



德国总部：德国荣易科技集团有限公司

地址：德国杜塞尔多夫市克雷费尔德街19号
 邮箱/E-mail: awen@rtwj.com 邮编/Zip Code: 40549
 网址/Website: www.roeasy.de / www.roeasy.hk

GERMANY ROEASY TECHNOLOGY GROUP LIMITED

Adds: Krefelder Str.19,40549 Duesseldorf Germany.

中国区运营总公司：广东荣宇泰企业管理有限公司

地址：广州市白云区沙太路283号天健广场A1201-04
 电话/Tel: 020-36756028 传真/Fax: 020-36756028
 邮箱/E-mail: xgp@rtwj.com 网址/Website: www.ro-easy.com

GUANGDONG RONGYUTAI ENTERPRISE INC.

Adds: Room A1201-04, Tianjian International Decoration Plaza,
 No.283, Shatai Road, Guangzhou, China.

中国区独家代理公司：广州市荣泰五金制品有限公司

地址：广州市白云区蟪蜆东路4号（天健广场入口右侧荣泰五金广东总部）2栋
 电话/Tel: 0086-20-87046681 87046683 传真/Fax: 0086-20-87046682
 邮箱/E-mail: info@cnrongtai.com
 网址/Website: www.rt-hardware.com / www.rt-hardware.net

GUANGZHOU RONGTAI HARDWARE PRODUCTS LIMITED

Adds: No.4 East Chanchushi Rd., Baiyun District, Guangzhou, China.
 (On the Right form the Tianjian Square Main Entrance,
 Guangdong Headquarters of Rongtai Hardware)

生产基地：广东省汕头市荣易金属塑胶制品厂

工厂地址：广东省汕头市澄海区东里镇塘西工业区尾巷1号
 电话/Tel: 0086-754-85751190 传真/Fax: 0086-754-85752879

SHANTOU ROEASY HARDWARE PLASTIC PRODUCTS FACTORY

Factory Address: No.1, East Side, Tangxi Industrial Zone, Dongli,
 Chenghai, Shantou, Guangdong, China.

荣易
 ROEASY ISO9001:2000 認證企業



Furniture Hardware
 For Wardrobe Kitchen Bathroom Office

HINGE

铰链产品画册

荣易 ROEASY



名曰廣台 (佛山) TEL: 13923140158



Hongkong Rongtai Hardware(Group) Co.,Ltd,(short as Rongtai Group) was established in 1990.

Rongtai Group is a modern enterprise which's combining: manufacturing ; technique; trading and service. Also owned the world wide famous brands: ROEASY,Ronglisi, Kaili, Kechuang, Hequn, Meking, TDS,Suogu, etc.

In 2015 RONGTAI Group established a new brand ROEASY, it is for global marketing. With the management approach of Quality first and Customer foremost , there was already a complete set of normalization, scientific and standardization quality management measures and quality control system. We believe ROEASY can offer more professional, more scientific and more humanistic products for our life!

無需保養，耐用，無聲，可靠

它是最先進的一種鉸鏈系列，榮易 ROEASY鉸鏈系列將給您留下十分深刻的印象。它們是高質量產品的代名詞，外形優美，使用舒適，經久耐用。

No Maintenance, Durable, Quiet, Reliable

It is one of the most advanced concealed hinge series. ROEASY Concealed Hinge will make a strong impression on you. With elegant design, comfortable usage and long durability, moreover, they are a synonym for high quality products.

品種齊全

對每一種可能的櫃門角度都有與之相配的鉸鏈，此系列覆蓋了100多個品種。ROEASY鉸鏈系列代表了質量，最高的技術水準和簡捷的使用方式。

快裝的特征，靈活多樣的調節功能和簡單的拆卸，ROEASY鉸鏈系列的使用非常方便。

Great Variety

As to every possible angle for the cabinet door, all have its matching concealed hinge, which covers over 100 varieties. ROEASY Concealed Hinge Series represent quality, highest technical standard and simple usage way.

With fast-assembling feature, flexible adjustment and easy removal function, ROEASY Concealed Hinge Series is very convenient to use.

安裝簡單

ROEASY鉸鏈——其鉸杯的安裝簡易，而目非常牢固，特平的鉸臂表面，是外形優美，技術上乘的一個品種。


Easy Installation

ROEASY Concealed Hinge--- easy and strong installation hinge cup, smooth hinge arm, is elegant appearance and technically well made products.

Clip-on fast-assembling Concealed Hinge

自卸快裝鉸鏈

..100% accurate

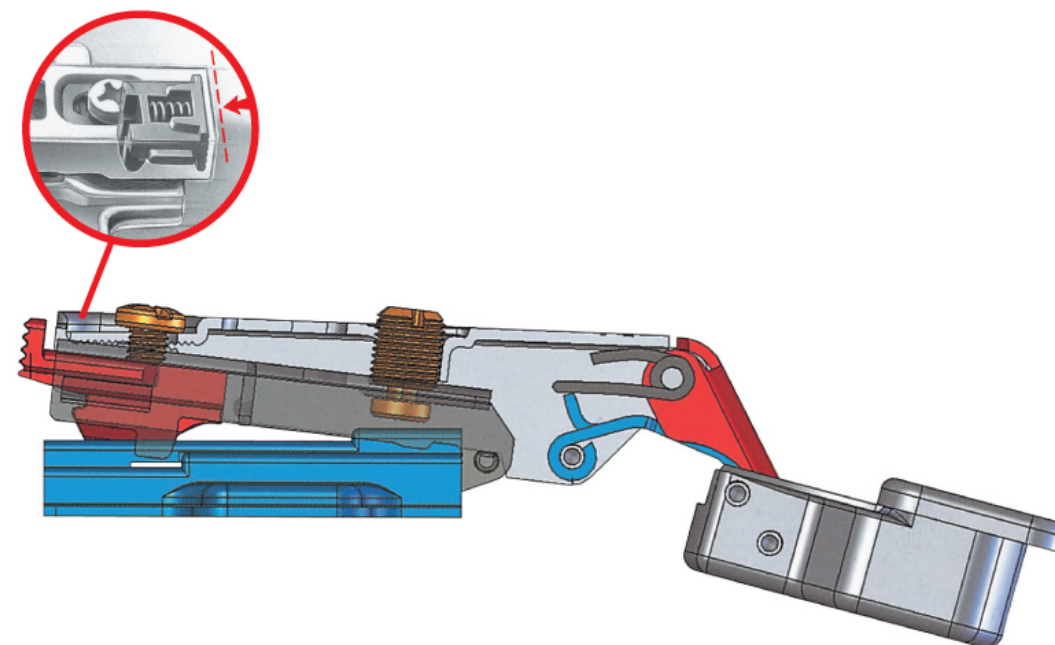

...100%精確到位

整個的ROEASY鉸鏈系列具備快裝的特征，只需指尖輕輕的一壓，就可安全地安裝。操作中，您可以很清楚地聽到輕輕的咔聲。這就表明鉸臂和底座已經精確地安裝好。

The whole ROEASY Concealed Hinge series is with the fast-assembling feature. Only your finger tips press gently, it can be safely installed. During operation, you can clearly hear the hinge click softly. It indicates that the hinge arm and base plate have been accurately installed.

全球領先的內置阻尼系統，裝備了整個ROEASY鉸鏈系列，緩緩關閉的櫃門，帶給你無比舒心的感受。

The whole ROEASY Concealed Hinge series, equipped with world-leading Soft-closing system, make the cabinet door close slowly, which will bring you much more comfortable feeling.


除了舒適簡單外，安全性能同樣重要。高承受力，通過超過4萬次的反復啓閉測試，持久耐用是ROEASY鉸鏈系列的恒久承諾。

With comfort and simpleness, safety is also important. What's more, it is high bearing capacity design, which passed over 40000 open-close test. So long durability is our ROEASY Concealed Hinge' s unvarying promise.

榮易
ROEASY

Installation technological information

安裝技術信息




直臂
門全部覆蓋住櫃側板，兩者之間有一個間隙，以便門可以安全地打開。

直臂0毫米

Full overaly

The door covers the side panel of the cupboard door completely, with a gap between them, in order to open the door smoothly.

Full overlay 0mm

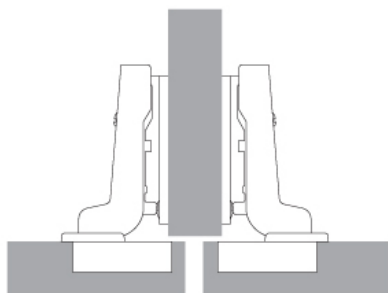


中曲
在這種情況下，兩扇門共用一個側板。它們之間有一個所要求的最小總間隙。每扇門的覆蓋距離相應地減少，需要採用鉸臂彎曲的鉸鏈。

中曲(9.5毫米)

Half overlay

In this case, two doors use one side panel, with a required minimum gap between them, so the covered distance of each door is decreased accordingly; therefore, a hinge with curve-armed is needed

Half overlay 9.5mm



大曲
在這種情況下，門位于櫃內，在櫃側板旁。它也需要一個間隙，以便門可以安全地打開。需要採用鉸臂非常彎曲的鉸鏈。

大曲(16毫米)

Inset

In this case, the door is fixed by the side panel of the inner cupboard. It also needs a gap, in order to open the door smoothly. Therefore, a hinge with very quite curved arm is needed.

Inset 16mm

最小間隙

最小間隙指打開門時所需的門側邊最小距離。最小間隙是由A距離，門厚度和鉸鏈類型所決定的。當門邊為圓角時，最小間隙相應減少。所需的最小間隙可以從每種不同的鉸鏈對應表中查找。

半蓋門的最小間隙

當兩扇門共用一個側板時，所要求的總間隙應為兩倍的最小間隙，以便兩扇門可以同時打開。

Minimum gap

Minimum gap refers to the required minimum gap for the side door panel when the door is opened.

Minimum gap depends on the A distance, door thickness and concealed hinge style When the door is rounded, minimum gap should be decreased accordingly.

Required minimum gap can be found from the corresponding table of the different hinge.


Half overlay's minimum gap

When the two doors share one side door panel, the required total minimum gap should be twice the minimum gap

In order to open the two doors at the same time.



Minimum gap
最小間隙

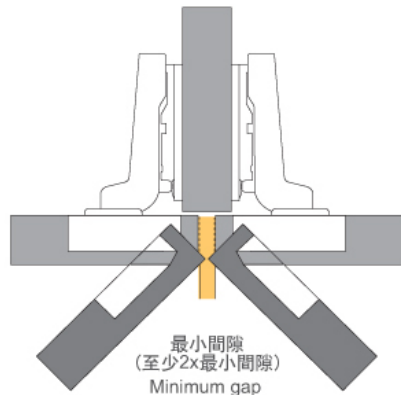

最小間隙
(至少2x最小間隙)
Minimum gap
(At least twice minimum gap)

Installation technological information

安裝技術信息

K面板尺寸

K距離指門邊和鉸杯孔邊之間的距離。每種鉸鏈的可用的最大K尺寸因不同的鉸鏈型號而不同。K距離越大，最小間隙就越小。

K distance

K=Distance between door edge and drilling holes on hinge cup.

The maximum available K size of each concealed hinge will be changed due to the different model.

The more K distance, the less minimum gap

D門覆蓋距離

D門覆蓋距離指門覆蓋側板的距離。

Door covered distance


D=Required overlay on side panel

間隙


間隙指在直臂的情況下，門外邊到櫃外邊的距離；在中曲的情況下，兩扇門之間的距離；在大曲的情況下，間隙指門外邊到櫃側板內邊的距離。

Gap


When it is full-overlay, the gap refers to the distance from outside door to the outside cabinet. When it is half overlay; the gap refers to the distance between the two doors.When it is inset, the gap refers to the distance from outside door to inner cabinet side panel.



K面板尺寸
K distance

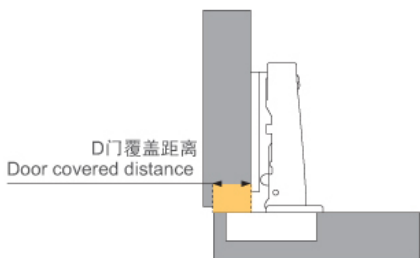

D門覆蓋距離
Door covered distance



間隙
Gap

每扇門所需的鉸鏈數

門寬度，門的高度和門的材料質量是每扇門所需的鉸鏈數的決定因素。在實際操作中，出現的各種因素由于情況的不同而不同。所以右圖中所列明的鉸鏈數只能作為參考數據。在情況不明的時候，建議作一個試驗。出于穩定性方面考慮，鉸鏈之間的距離應盡量大一些。

The quantity of concealed hinge for each door


The quantity of concealed hinge mainly depends on the width, height and the material of the door.In practice, the various factors that appear will be different according to the different circumstances. So the data listed as right picture are for your reference only. Under the unknown situation, it is recommended to make a test. Considering the stability, the distance between the hinges should be larger.

X=鉸鏈之間的距離


(當使用19毫米厚刨花板，比重750公斤/米³時)

X = the distance between the concealed hinge

(when using 19 mm thickness flakeboard ,weight :750 kg/m³)

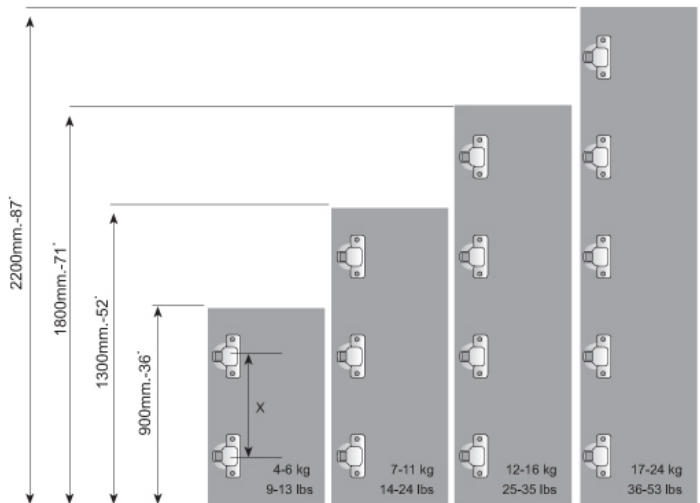


The installation method of glass concealed hinge
玻璃鉸鏈安裝方式




解釋：
下圖中，鉸鏈和鉸鏈底座高度是以1:1的比例畫出的。當K距離=5.5毫米時，可以直接在圖上量出門覆蓋距離。同時，從櫃邊到X的距離決定了櫃邊到排鑽孔的距離。

Explanation:
In the following figure, the hinge and hinge base plate height is showed based on proportion of 1:1. When K distance is 5.5mm, the door covered distance can be measured directly from the picture. Meanwhile, the distance from the cabinet edge to the drilling hole depends on its edge distance.


半蓋門
門覆蓋距離調節範圍+2毫米/-4毫米
Half overlay door
Door covered distance adjusting range :+ / - 2 mm /4 mm

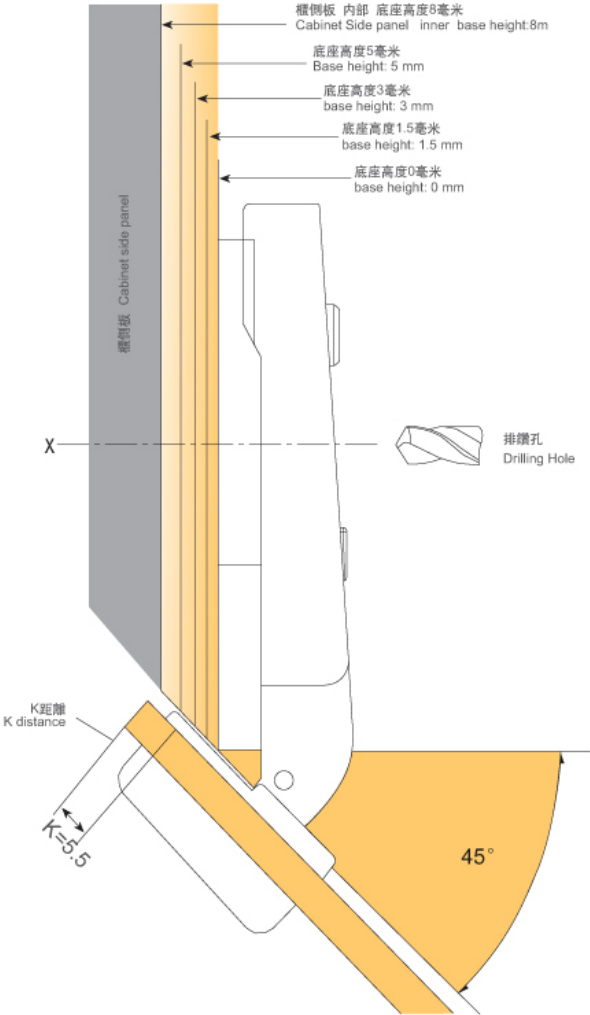

內側門
門覆蓋距離調節範圍+2毫米/-4毫米
Inset door
Door covered distance adjusting range: + / - 2 mm/ 4 mm

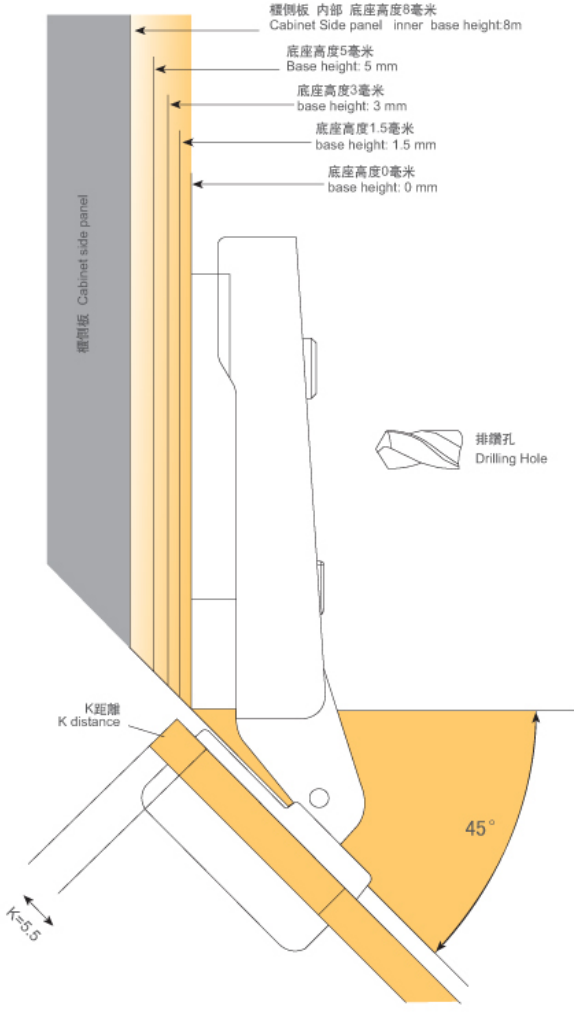

The installation method of Aluminum concealed hinge
鋁框鉸鏈快裝方式


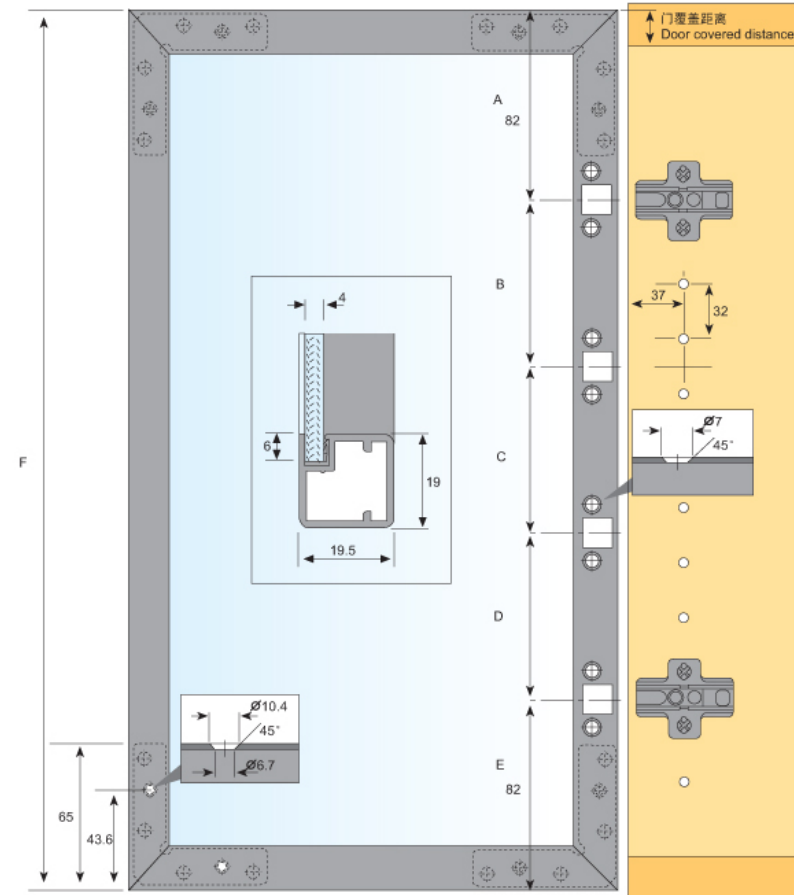


垂直型材上下每邊最多載短40毫米水平型材的間隙在設計時考慮的是3毫米，如需其他尺寸，可將其載短將型材按照32毫米系統的要求上下載短以便固定在櫃中32毫米系統的排鑽孔中

Vertical profile up or down each side should be cut short up to 40 mm. For the clearance of the horizontal profiles, 3 mm is reasonable. If you need other sizes, you can truncate the profile required 32 mm system up or down each side in order to be fixed to the cabinet drilling hole required 32 mm system.


鋁框門上可使用
以下鉸鏈：
榮易ROEASY鋁框門鉸鏈
快裝鉸鏈，
開啓角90°
門可停留到任何角度
完整的門覆蓋距離
偏心的深度調節功能
用于鋁框門鉸杯固定螺絲

For Aluminum cabinet door using
ROEASY Aluminum cabinet door concealed hinge
Fast-assembling hinge
Opening angle: 90°
The door can stay to any angle
Complete door covered distance
Eccentric depth control function
Fixed screw for aluminum frame door concealed hinge cup using

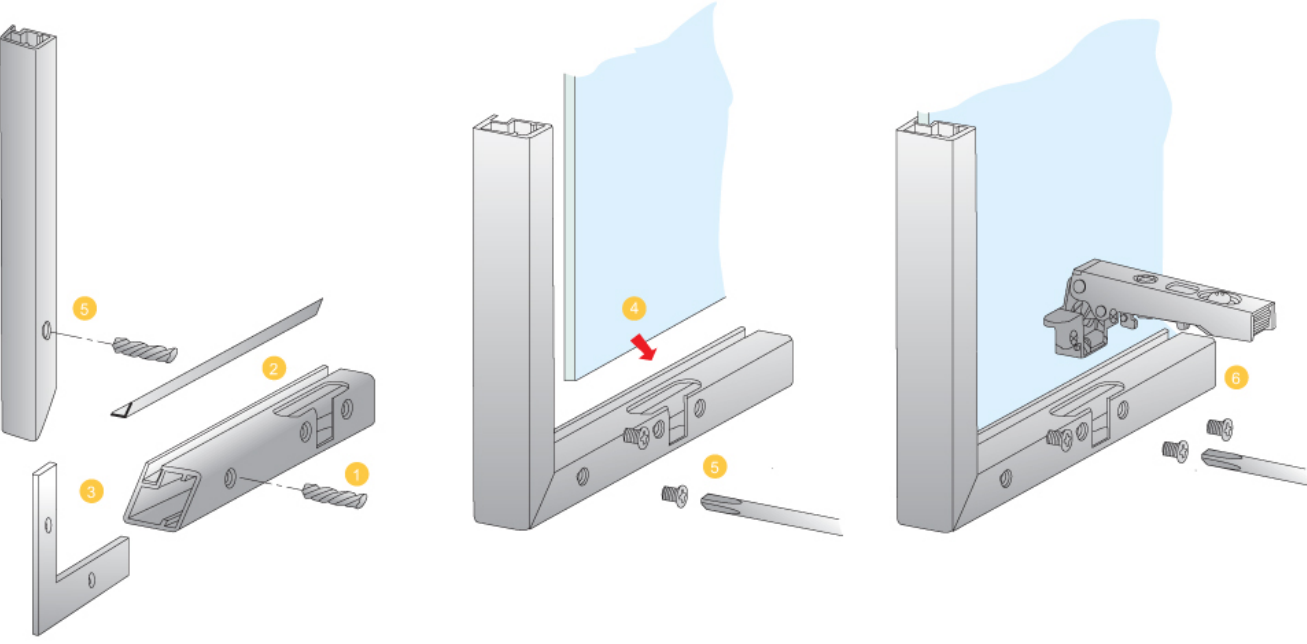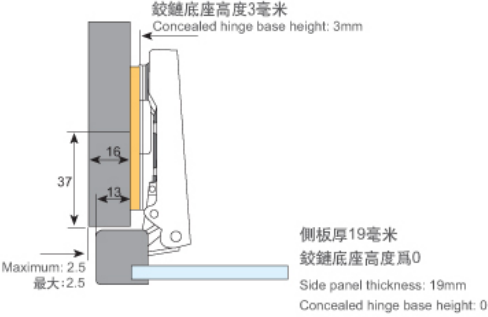

Angle concealed hinge installation

角度鉸鏈安裝

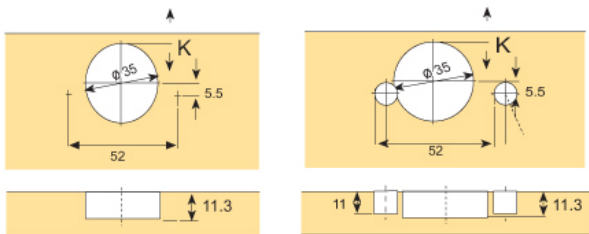

榮易ROEASY鉸鏈
快裝鉸鏈
偏心的深度調節功能
折疊門鉸鏈
開啓角25° / 90°
ROEASY concealed hinge
Fast-assembling concealed hinge
Eccentric depth control function
Folding door concealed hinge
Opening angle 25° /90°

當打開整套折疊門時，先將帶把手的那扇門打開25° 有了這個角度，整個的櫃門才能進一步地打開在門打開的情況下，兩扇小門可以通過鉸鏈作用在同一直線上，以便敞開所有的櫃內空間，舒適地拿放物品


When open the folding door, the door with handle should be opened to 25° firstly. With this angel, the whole cabinet door is able to be opened further. When the doors are open,the two cabinet doors act on the same straight line via concealed hinges in order to open the whole cabinet space and handle items comfortable.

由于鉸鏈的自動關閉功能，帶把手的那扇門上不需要門吸

As the hinge is automatically closed, the cabinet door with handle no needs a stopper.


特征：
兩扇門是一樣的
不需特殊鉸杯孔
通過對角調節功能配合不同厚度的門
側板的排鑽孔的距離為41毫米

Feature:
Two doors are the same
No need special concealed hinge cup
Matching the different thickness door via diagonal adjustment function
The distance for Side panel drilling hole is 41mm

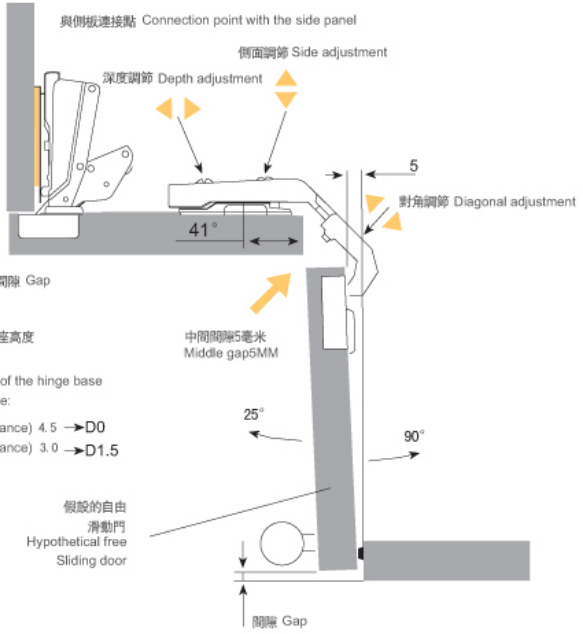

特征：
所有鉸杯孔在一扇門上
可能達到門的細小間隙
不需特殊鉸杯孔
兩扇門寬度一樣
通過對角調節功能配合不同厚度的門
在櫃側的門兩面，K距離相等
側板排鑽孔的距離為37毫米

Feature:
All the hinge cup holes in one cabinet door
Available minimum gap
No need special cup holes
Both door width same
Via adjusting diagonal function to match different door thickness
Both side cabinet door K distance same
The drilling distance of the side board is 37mm

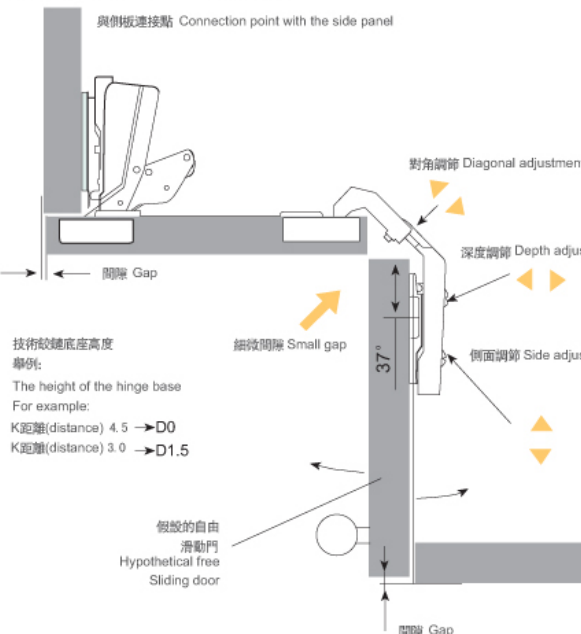

鉸鏈具備對角調節功能，即可以調節16到20毫米厚範圍的門和3到6毫米範圍的K距離
Concealed hinge is with diagonal adjustment function, not only can adjust the door thickness from 16mm to 20mm, but also can adjust the K distance from 3mm to 6mm

Optional fitting illustration

可選配件說明


裝飾蓋 Arm cover

				
銅鍍鎳 Nickel plated	銅鍍鎳 Nickel plated	不銹鋼 Stainless steel	不銹鋼 Stainless steel	
無印 No logo	衝壓 Stamping	無印 No logo	衝壓 Stamping	
CH-P34W	CH-P34C	CH-P35W	CH-P35C	


鉸杯蓋 Cup cover

				
銅鍍鎳 Nickel plated	不銹鋼 Stainless steel			
無印 No logo	無印 No logo			
CH-P54W	CH-P55W			


木牙螺絲 Chipboard screw

		螺絲頭直徑(A) Diameter of screw(A)	長度(X) Length (X)	產品編號 Item no.
		7mm/3.5mm	14mm	CH-P614
		8mm/4mm	16mm	CH-P616
		8mm/4mm	25mm	CH-P625
		8mm/4mm	35mm	CH-P635

歐式螺絲 Euro screw

		螺絲頭直徑(A) Diameter of screw(A)	長度(X) Length (X)	產品編號 Item no.
		8.3mm	16mm	CH-P716

膠粒螺絲 Dowel screw

		螺絲頭直徑(A) Diameter of screw(A)	長度(X) Length (X)	產品編號 Item no.
		8mm	10mm	CH-P808
		10mm	10mm	CH-P810

Regulation of product's name & number

產品編號 命名規則

家具用途、種類繁多，因此各種款式、各種功能的暗鉸鏈相伴而生，多不勝數，市場上沒有規範的產品貨號和各款式的統一名稱。爲了方便工程使用和產品流通，榮泰五金根據各款式暗鉸鏈的杯徑、用途、功能的不同，對產品進行了數字化的編號，希望業界人士能够接受并給予支持。

There are a great variety of the furniture,so,kinds of the conceal hinge accompany for the requirement.But it is not a normal way to standard and unity all the products in market.In order to the use of engineer and circulation in convenience.Our factory is according to all different kinds of items at its cup, use and function to draw up it into named by humanity and digital number.Sincerely hope this classify can be approved and supported by the same trades and occupation.

第一位數：按鉸杯直徑或用途區分	1st number,based on the Dia.of cup or use
1爲26杯暗鉸鏈	"1" show 26mm cup
2爲35杯暗鉸鏈	"2"show 35mm cup
3爲40杯暗鉸鏈	"3"show 40mm cup
5爲玻璃暗鉸鏈	"5"show glass hinge
6爲鉸框暗鉸鏈	"6" show aluminum frame hinge

特殊鉸鏈命名：特殊名字-（取代第一位）	Name for the special hinge,make the special
30度命名爲:30-	Name instead of the 1st (for example)
45度命名爲:45-	30 degree hinge show 30-
90度命名爲:90-	45 degree hinge show 45-
165度命名爲:165-	90 degree hinge show 90-
大號帶膠墊底座液壓鉸鏈命名爲:666	65 degree hinge show 165-
小號帶膠墊底座液壓鉸鏈命名爲:555	Big plastic soft-closing hinge show 666
	Small plastic soft-closing hinge show 555

第二位數：按閉合方式區分	2nd number,based on the open close
3爲反彈暗鉸鏈	"3"show push-open
5爲一段力普通暗鉸鏈	"5" show one-way
6爲二段力普通暗鉸鏈	"6"show two-way
8爲二段力緩衝暗鉸鏈	"8"show two-way soft-closing
9爲液壓暗鉸鏈	"9" show soft-closing

第三位數：按安裝方式區分	3rd number,based on the installation
1爲滑入式或者固定式底座暗鉸鏈	"1" show slide-on or inseparable base
2爲鑰匙孔暗鉸鏈	"2"show key-hole
3爲自卸式暗鉸鏈	"3" show clip-on
5爲南美短臂軟暗鉸鏈	"5" show short arm

第四部分爲表面處理代號	4th number,based on the finish
SS爲不銹鋼材質的暗鉸鏈	SS show hinge made of stainless steel
AB爲鐵鍍青古銅的暗鉸鏈	AB show iron hinge with anti-brass
AC爲鐵鍍紅古銅的暗鉸鏈	AC show iron hinge with anti-copper
沒有則默認爲鐵鍍鎳暗鉸鏈	No sign is deemed as iron hinge with nickel

第五部分爲直臂/中曲/大曲的區分	5th number
F表示全蓋直臂	F show full overlay
H表示半蓋中曲	H show half overlay
I表示內藏大曲	I show inset

第六部分爲底座形式的區分	6th number
-T爲兩孔底座暗鉸鏈	"-T" show two holes base
-E爲四孔底座暗鉸鏈	"-E" show four holes base
-P爲飛機腳底座暗鉸鏈	"-P" show butterfly style base
-3D爲3D調節底座鉸鏈	"-3D" show 3D adjustment base

例如：
263SSF-T表示：35杯二段力自卸不銹鋼暗鉸鏈直臂兩孔底座
165-91I-E表示：165度液壓固定暗鉸鏈大曲四孔底座

For example:
"263SSF-T" show: 35mm cup ,two-way,clip-on,material stainless steel,full overlay,and two holes base,which item no. is 263SSF-T
"165-91I-E" show: 165 degree,soft-closing, inset, inseparable base with four holes,which item no. is 165-91I-E

Contents

目錄

液压铰链系列 Soft-closing hinge series

01	26mm cup inseparable soft-closing hinge CH-191 26mm杯固定式缓冲铰链	02	26mm cup clip-on soft-closing hinge CH-193 26mm杯自卸缓冲铰链	03	35mm cup inseparable soft-closing hinge with plastic base CH-555 35mm杯固定式缓冲带塑胶底座铰链
04	35mm cup inseparable soft-closing hinge with plastic base CH-666 35mm杯固定式缓冲带塑胶底座铰链	05	35mm cup inseparable soft-closing hinge CH-291 35mm杯固定式缓冲铰链	06	35mm cup clip-on soft-closing hinge CH-293 35mm杯自卸缓冲铰链
07	35mm cup inseparable soft-closing butterfly style hinge CH-291P 35mm杯固定式缓冲飞机脚铰链	08	35mm cup clip-on soft-closing butterfly style hinge CH-293P 35mm杯自卸缓冲飞机脚铰链	09	35mm cup inseparable soft-closing stainless steel 201 hinge CH-291SS201 35mm杯固定式缓冲不锈钢201铰链
10	35mm cup clip-on soft-closing stainless steel 201 hinge CH-293SS201 35mm杯自卸缓冲不锈钢201铰链	11	35mm cup inseparable soft-closing stainless steel 304 hinge CH-291SS304 35mm杯固定式缓冲不锈钢304铰链	12	35mm cup clip-on soft-closing stainless steel 304 hinge CH-293SS304 35mm杯自卸缓冲不锈钢304铰链
13	35mm cup slide-on soft-closing hinge CH-291S 35mm杯滑入式缓冲铰链	14	35mm cup clip-on soft-closing hinge with 3D adjustment base CH-293 3D 35mm杯自卸缓冲铰链(3D调节底座)	15	35mm cup inseparable soft-closing hinge with short arm CH-295 35mm杯固定式缓冲短臂铰链
16	40mm cup inseparable soft-closing hinge with short arm CH-395A 40mm杯固定式缓冲短臂铰链	17	45mm cup inseparable soft-closing hinge with short arm CH-395B 45mm杯固定式缓冲短臂铰链	18	45 degree inseparable soft-closing hinge CH-45-91 45度固定式缓冲铰链
19	45 degree clip-on soft-closing hinge CH-45-93 45度自卸缓冲铰链	20	45 degree inseparable soft-closing hinge CH-90-91 90度固定式缓冲铰链	21	90 degree clip-on soft-closing hinge CH-90-93 90度自卸缓冲铰链
22	165 degree clip-on soft-closing hinge CH-165-93 165度自卸缓冲铰链	23	40mm cup inseparable soft-closing hinge CH-391 40mm杯固定式缓冲铰链	24	40mm cup clip-on soft-closing hinge CH-393 40mm杯自卸缓冲铰链
25	35mm cup inseparable soft-closing glass hinge CH-591 35mm杯固定式缓冲玻璃铰链	26	35mm cup clip-on soft-closing glass hinge CH-593 35mm杯自卸缓冲玻璃铰链	27	inseparable soft-closing aluminum frame hinge CH-691 铝框固定式缓冲铰链
28	Clip-on soft-closing aluminum frame hinge CH-693 铝框自卸缓冲铰链	29	35mm cup inseparable two-way soft-closing hinge CH-281 35mm杯固定式二段力缓冲铰链	30	35mm cup clip-on two-way soft-closing hinge CH-283 35mm杯自卸二段力缓冲铰链
31	35mm cup clip-on two-way soft-closing hinge with 3D adjustment base CH-283 3D 35mm杯自卸二段力缓冲铰链(3D调节底座)				

普通铰链系列 Normal hinge series

33	26mm cup slide-on one-way hinge with short arm CH-155 26mm杯滑入式一段力短臂铰链	34	26mm cup slide-on one-way hinge CH-151 26mm杯滑入式一段力铰链	35	26mm cup slide-on one-way hinge with key-hole CH-152 26mm杯滑入式一段力钥匙孔铰链
36	26mm cup slide-on one-way hinge with key-hole CH-152B 26mm杯滑入式一段力钥匙孔铰链	37	35mm cup slide-on one-way hinge CH-251 35mm杯滑入式一段力铰链	38	35mm cup slide-on one-way hinge with key-hole CH-252 35mm杯滑入式一段力钥匙孔铰链
39	35mm cup slide-on two-way hinge CH-261 35mm杯滑入式二段力铰链	40	35mm cup clip-on two-way hinge CH-263 35mm杯自卸二段力铰链	41	35mm cup slide-on two-way stainless steel hinge CH-261SS 35mm杯滑入式二段力不锈钢铰链
42	35mm cup clip-on two-way stainless steel hinge CH-263SS 35mm杯自卸二段力不锈钢铰链	43	35mm cup slide-on two-way butterfly style hinge CH-261 P1 35mm杯滑入式二段力飞机脚铰链	44	35mm cup slide-on two-way butterfly style hinge CH-261 P2 35mm杯滑入式二段力飞机脚铰链
45	35mm cup slide-on two-way butterfly style hinge with key-hole CH-262P 35mm杯滑入式二段力飞机脚钥匙孔铰链	46	35mm cup slide-on Push-open hinge CH-231 35mm杯滑入式反弹铰链	47	35mm cup slide-on two-way hinge with short arm CH-265A 35mm杯滑入式二段力美式短臂铰链
48	35mm cup slide-on two-way hinge with short arm CH-265B 35mm杯滑入式二段力美式短臂铰链	49	-45 degree slide-on hinge CH-45-61 -45度滑入式铰链	50	-30 degree slide-on hinge CH-30-61 -30度滑入式铰链
51	30 degree slide-on hinge CH-30-61 30度滑入式铰链	52	45 degree slide-on hinge CH-45-61 45度滑入式铰链	53	90 degree slide-on hinge CH-90-61 90度滑入式铰链
54	115 degree slide-on hinge CH-115-61 115度滑入式铰链	55	135 degree slide-on hinge CH-135-61 135度滑入式铰链	56	180 degree slide-on hinge CH-180-61 180度滑入式铰链
57	165 degree slide-on hinge CH-165-61 165度滑入式铰链	58	40mm cup slide-on two-way hinge CH-361 40mm杯滑入式二段力铰链	59	26mm cup inseparable one-way glass hinge with key-hole CH-551 26mm杯固定式一段力钥匙孔玻璃铰链
60	26mm cup slide-on two-way glass hinge CH-561 26mm杯滑入式二段力玻璃铰链	61	Inseparable two-way aluminum frame hinge CH-661 铝框固定式二段力铰链	62	Clip-on two-way aluminum frame hinge CH-663 铝框自卸二段力铰链
63	Furniture concealed hinge FH-001 柜门铰链	64	Furniture concealed hinge FH-002 柜门铰链	65	Invisible hinge FH-003 隐蔽合页

66	Piano hinge PH 钢琴铰链
-----------	-------------------------------

荣易
ROE'ASY

26mm cup inseparable soft-closing hinge
CH-191 26mm杯固定式緩衝鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-22mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:26毫米
面板尺寸(K):3-5毫米
門可選用板厚度:14-22毫米

訂貨編號 (ITEM NO.):


CH-191F-T	Full Overlay 2 holes 直臂兩孔	
CH-191H-T	Half Overlay 2 holes 中曲兩孔	
CH-191I-T	Inset 2 holes 大曲兩孔	

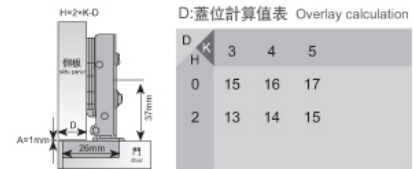

Full Overlay 直臂

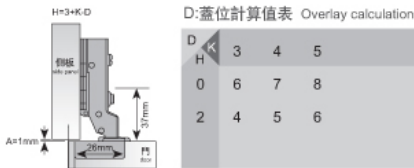


Half Overlay 中曲

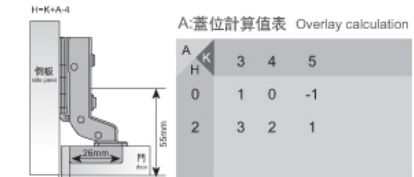

Inset 大曲

可選鉸杯 (Optional hinge cups)



38mm孔距

可選配件 (Optional fitting)



荣易
ROE'ASY

26mm cup clip-on soft-closing hinge
CH-193 26mm杯自卸緩衝鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-22mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:26毫米
面板尺寸(K):3-5毫米
門可選用板厚度:14-22毫米

訂貨編號 (ITEM NO.):


CH-193F-T	Full Overlay 2 holes 直臂兩孔	
CH-193H-T	Half Overlay 2 holes 中曲兩孔	
CH-193I-T	Inset 2 holes 大曲兩孔	

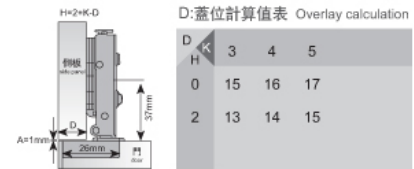

Full Overlay 直臂

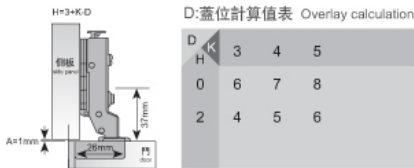


Half Overlay 中曲

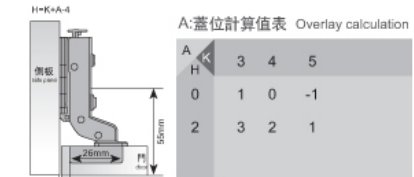

Inset 大曲

可選鉸杯 (Optional hinge cups)



38mm孔距

可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup inseparable soft-closing hinge with plastic base
CH-555 35mm杯固定式緩衝帶塑膠底座鉸鏈



Soft-closing hinge series




Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-20mm

液壓鉸鏈系列


開啓角度：95度
鉸杯高度：11.3毫米
鉸杯直徑：35毫米
面板尺寸(K)：3-7毫米
門可選用板厚度：14-20毫米

訂貨編號(ITEM NO.):

CH-555F-E	Full Overlay 4 holes 直臂四孔	
CH-555H-E	Half Overlay 4 holes 中曲四孔	
CH-555I-E	Inset 4 holes 大曲四孔	

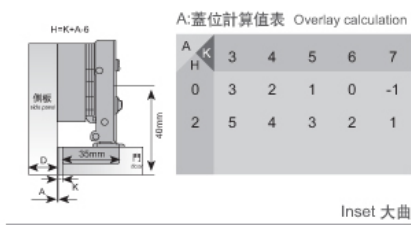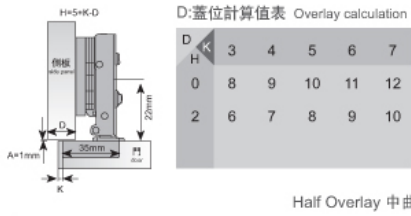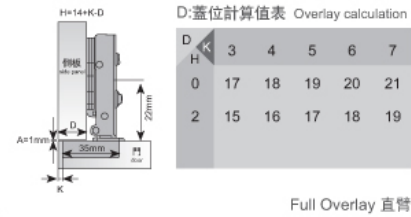

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup inseparable soft-closing hinge with plastic base
CH-666 35mm杯固定式緩衝帶塑膠底座鉸鏈



Soft-closing hinge series




Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度：95度
鉸杯高度：11.3毫米
鉸杯直徑：35毫米
面板尺寸(K)：3-7毫米
門可選用板厚度：14-23毫米

訂貨編號(ITEM NO.):

CH-666F-E	Full Overlay 4 holes 直臂四孔	
CH-666H-E	Half Overlay 4 holes 中曲四孔	
CH-666I-E	Inset 4 holes 大曲四孔	

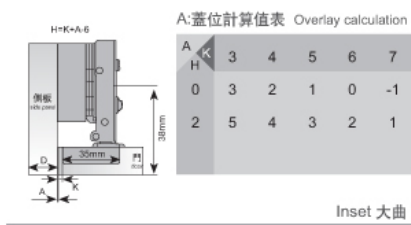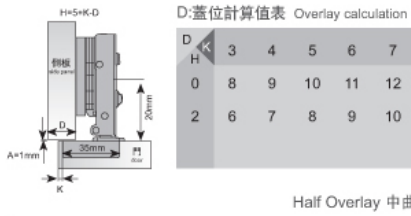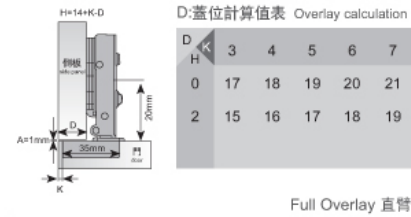

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



榮易
ROE'ASY

35mm cup inseparable soft-closing hinge
CH-291 35mm杯固定式緩衝鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-291F-T	Full Overlay 2 holes 直臂兩孔	
CH-291H-T	Half Overlay 2 holes 中曲兩孔	
CH-291I-T	Inset 2 holes 大曲兩孔	
CH-291F-E	Full Overlay 4 holes 直臂四孔	
CH-291H-E	Half Overlay 4 holes 中曲四孔	
CH-291I-E	Inset 4 holes 大曲四孔	

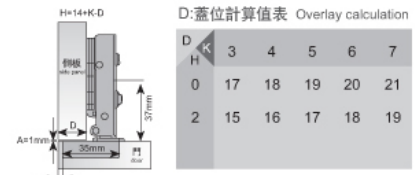

Full Overlay 直臂

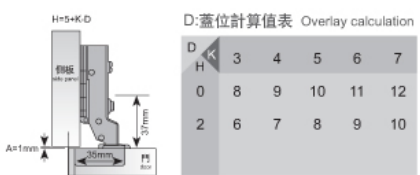


Half Overlay 中曲

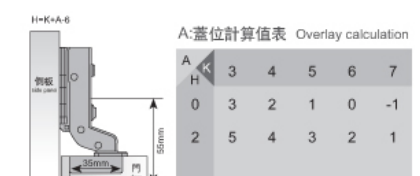

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



榮易
ROE'ASY

35mm cup clip-on soft-closing hinge
CH-293 35mm杯自卸緩衝鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):

CH-293F-T	Full Overlay 2 holes 直臂兩孔	
CH-293H-T	Half Overlay 2 holes 中曲兩孔	
CH-293I-T	Inset 2 holes 大曲兩孔	
CH-293F-E	Full Overlay 4 holes 直臂四孔	
CH-293H-E	Half Overlay 4 holes 中曲四孔	
CH-293I-E	Inset 4 holes 大曲四孔	

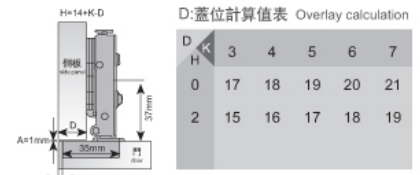

Full Overlay 直臂

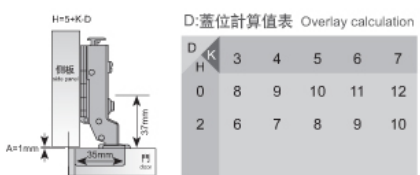


Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup inseparable soft-closing butterfly style hinge
CH-291P 35mm杯固定式緩衝飛機脚鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸 (K) :3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-291F-P	Full Overlay butterfly 直臂飛機底座	
CH-291H-P	Half Overlay butterfly 中曲飛機底座	
CH-291I-P	Inset butterfly 大曲飛機底座	

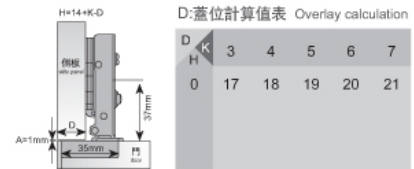

Full Overlay 直臂

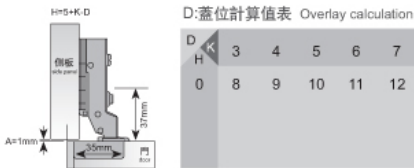


Half Overlay 中曲

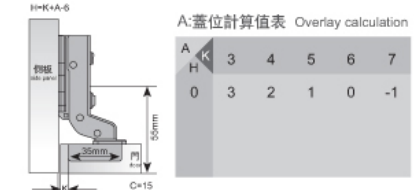

Inset 大曲

可選鉸杯 (Optional hinge cups)




可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup clip-on soft-closing butterfly style hinge
CH-293P 35mm杯自卸緩衝飛機脚鉸鏈

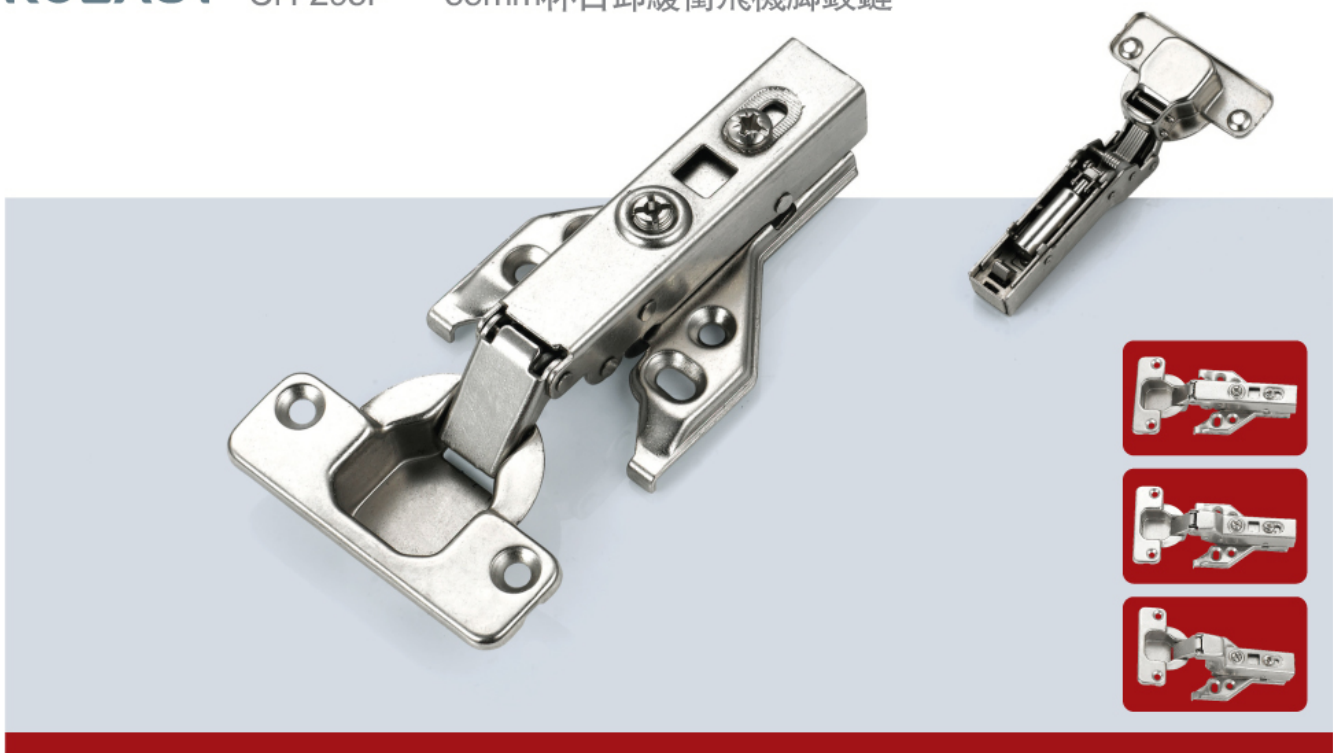

Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸 (K) :3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-293F-P	Full Overlay butterfly 直臂飛機底座	
CH-293H-P	Half Overlay butterfly 中曲飛機底座	
CH-293I-P	Inset butterfly 大曲飛機底座	

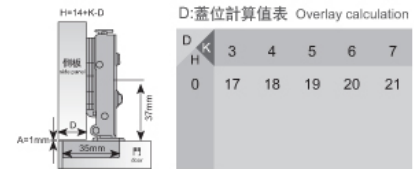

Full Overlay 直臂

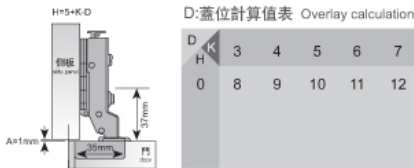


Half Overlay 中曲

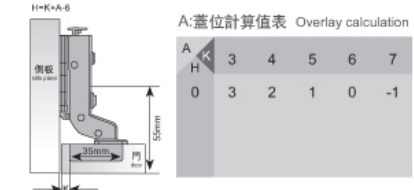

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup inseparable soft-closing stainless steel 201 hinge
CH-291SS201 35mm杯固定式緩衝不銹鋼201鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列

開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-291SS201F-E	Full Overlay 4 holes 直臂四孔	
CH-291SS201H-E	Half Overlay 4 holes 中曲四孔	
CH-291SS201I-E	Inset 4 holes 大曲四孔	

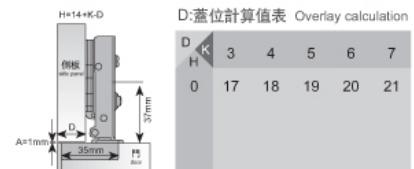

D:蓋位計算值表 Overlay calculation

D	K	3	4	5	6	7
0	17	18	19	20	21	


Full Overlay 直臂

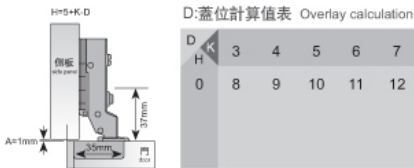

D:蓋位計算值表 Overlay calculation

D	K	3	4	5	6	7
0	8	9	10	11	12	

Half Overlay 中曲

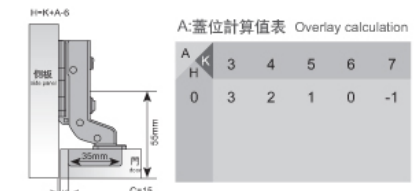


A:蓋位計算值表 Overlay calculation

A	H	K	3	4	5	6	7
0	3	2	1	0	-1		

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup clip-on soft-closing stainless steel 201 hinge
CH-293SS201 35mm杯自卸緩衝不銹鋼201鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列

開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-293SS201F-E	Full Overlay 4 holes 直臂四孔	
CH-293SS201H-E	Half Overlay 4 holes 中曲四孔	
CH-293SS201I-E	Inset 4 holes 大曲四孔	

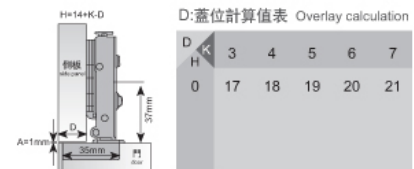

D:蓋位計算值表 Overlay calculation

D	K	3	4	5	6	7
0	17	18	19	20	21	


Full Overlay 直臂

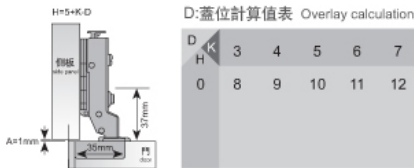

D:蓋位計算值表 Overlay calculation

D	K	3	4	5	6	7
0	8	9	10	11	12	

Half Overlay 中曲

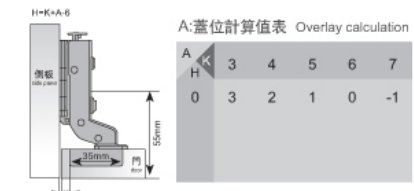


A:蓋位計算值表 Overlay calculation

A	H	K	3	4	5	6	7
0	3	2	1	0	-1		

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup inseparable soft-closing stainless steel 304 hinge
CH-291SS304 35mm杯固定式緩衝不銹鋼304鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-291SS304F-E	Full Overlay 4 holes 直臂四孔	
CH-291SS304H-E	Half Overlay 4 holes 中曲四孔	
CH-291SS304I-E	Inset 4 holes 大曲四孔	

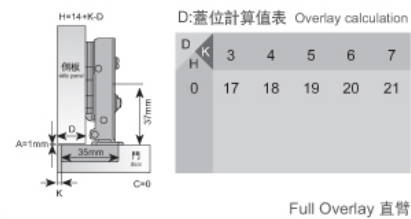

Full Overlay 直臂

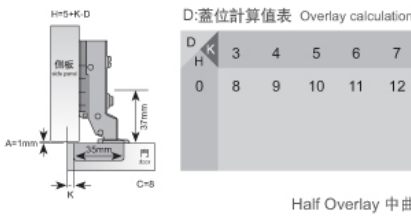


Half Overlay 中曲

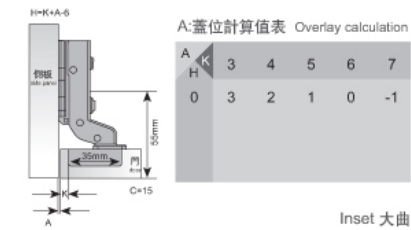

Inset 大曲

可選鉸杯 (Optional hinge cups)



48mm孔距

可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup clip-on soft-closing stainless steel 304 hinge
CH-293SS304 35mm杯自卸緩衝不銹鋼304鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):


CH-293SS304F-E	Full Overlay 4 holes 直臂四孔	
CH-293SS304H-E	Half Overlay 4 holes 中曲四孔	
CH-293SS304I-E	Inset 4 holes 大曲四孔	

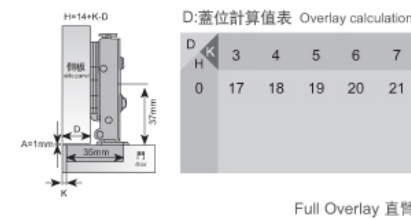

Full Overlay 直臂

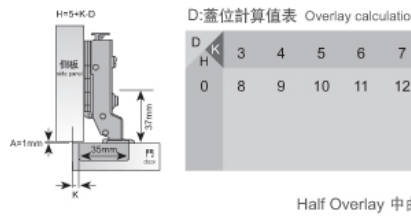


Half Overlay 中曲

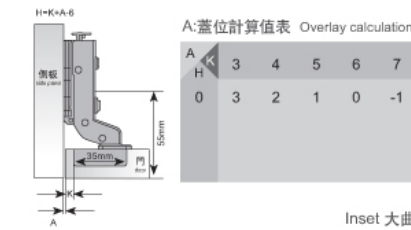

Inset 大曲

可選鉸杯 (Optional hinge cups)



48mm孔距

可選配件 (Optional fitting)



荣易 ROE'ASY 35mm cup slide-on soft-closing hinge CH-291S 35mm杯滑入式緩衝鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):

CH-291SF-E	Full Overlay 4 holes 直臂四孔	
CH-291SH-E	Half Overlay 4 holes 中曲四孔	
CH-291SI-E	Inset 4 holes 大曲四孔	

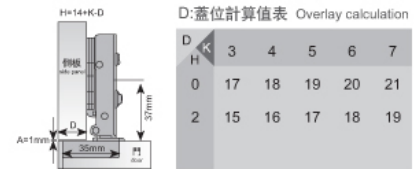

Full Overlay 直臂

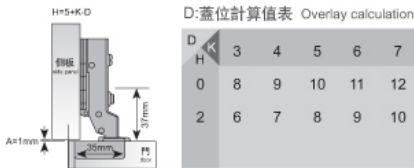


Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易 ROE'ASY 35mm cup clip-on soft-closing hinge with 3D adjustment base CH-293 3D 35mm杯自卸緩衝鉸鏈 (3D調節底座)



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

订货编号 (ITEM NO.):

CH-293F-3D	Full Overlay 4 holes 直臂四孔	
CH-293H-3D	Half Overlay 4 holes 中曲四孔	
CH-293I-3D	Inset 4 holes 大曲四孔	

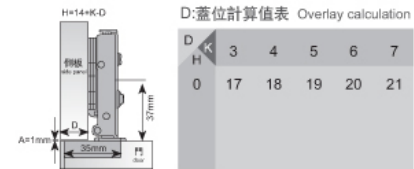

Full Overlay 直臂

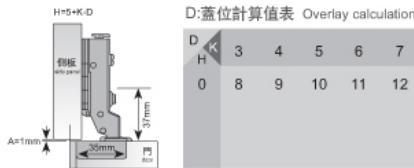


Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

35mm cup inseparable soft-closing hinge with short arm
CH-295 35mm杯固定式緩衝短臂鉸鏈



Soft-closing hinge series

Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-295-T Full Overlay 2 holes 直臂兩孔




D=12.5mm(K=3mm)



D:蓋位計算值表 Overlay calculation

D	3	4	5
0	13	14	15

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

40mm cup inseparable soft-closing hinge with short arm
CH-395A 40mm杯固定式緩衝短臂鉸鏈



Soft-closing hinge series

Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:40mm
Distance from door edge to the cup (K):3-12mm
Recommended door thickness:16-40mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:40毫米
面板尺寸(K):3-12毫米
門可選用板厚度:16-40毫米

訂貨編號(ITEM NO.):

CH-295A-T Full Overlay 2 holes 直臂兩孔




D=25.5mm(K=11mm)



D:蓋位計算值表 Overlay calculation

D	3	4	5	6	7	8	9	10	11	12
0	17	18	19	20	21	22	23	24	25	26

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

45mm cup inseparable soft-closing hinge with short arm
CH-395B 45mm杯固定式緩衝短臂鉸鏈



Soft-closing hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:45mm
Distance from door edge to the cup (K):3-12mm
Recommended door thickness:16-40mm

液壓鉸鏈系列


開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:45毫米
面板尺寸(K):3-12毫米
門可選用板厚度:16-40毫米

訂貨編號(ITEM NO.):

CH-395B-T Full Overlay 2 holes 直臂兩孔



可選鉸杯 (Optional hinge cups)



D:蓋位計算值表 Overlay calculation

D	3	4	5	6	7	8	9	10	11	12
0	24	25	26	27	28	29	30	31	32	33

可選配件 (Optional fitting)



荣易
ROE'ASY

45 degree inseparable soft-closing hinge
CH-45-91 45度固定式緩衝鉸鏈



Soft-closing hinge series


Open degree: 45°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列

開啓角度:45度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):


CH-45-91F-T	Full Overlay 2 holes 直臂兩孔
CH-45-91H-T	Half Overlay 2 holes 中曲兩孔
CH-45-91I-T	Inset 2 holes 大曲兩孔
CH-45-91F-E	Full Overlay 4 holes 直臂四孔
CH-45-91H-E	Half Overlay 4 holes 中曲四孔
CH-45-91I-E	Inset 4 holes 大曲四孔



D:蓋位計算值表 Overlay calculation

D	4	5	6	7
0	37/1.5	38/2.5	35/3.3	34/4.2
2	37/-0.5	38/0.5	35/1.3	34/2.2
X				D

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

45 degree clip-on soft-closing hinge
CH-45-93 45度自卸緩衝鉸鏈



Soft-closing hinge series

Open degree: 45°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm



液壓鉸鏈系列

開啓角度:45度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-45-93F-T	Full Overlay 2 holes 直臂兩孔	
CH-45-93H-T	Half Overlay 2 holes 中曲兩孔	
CH-45-93I-T	Inset 2 holes 大曲兩孔	
CH-45-93F-E	Full Overlay 4 holes 直臂四孔	
CH-45-93H-E	Half Overlay 4 holes 中曲四孔	
CH-45-93I-E	Inset 4 holes 大曲四孔	

可選鉸杯 (Optional hinge cups)



D:蓋位計算值表 Overlay calculation

D	H	K	4	5	6	7
0			37/1.5	38/2.5	35/3.3	34/4.2
2			37/-0.5	38/0.5	35/-1.3	34/-2.2
		X				D

可選配件 (Optional fitting)



荣易
ROE'ASY

90 degree inseparable soft-closing hinge
CH-90-91 90度固定式緩衝鉸鏈



Soft-closing hinge series

Open degree:90°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm



液壓鉸鏈系列

開啓角度:90度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-90-91F-T	Full Overlay 2 holes 直臂兩孔	
CH-90-91H-T	Half Overlay 2 holes 中曲兩孔	
CH-90-91I-T	Inset 2 holes 大曲兩孔	
CH-90-91F-E	Full Overlay 4 holes 直臂四孔	
CH-90-91H-E	Half Overlay 4 holes 中曲四孔	
CH-90-91I-E	Inset 4 holes 大曲四孔	

可選鉸杯 (Optional hinge cups)



D:蓋位計算值表 Overlay calculation

D	H	K	4	5
0			20/4.8	19/4.8
2			20/2.8	19/2.8
		X		D

可選配件 (Optional fitting)





Soft-closing hinge series

Open degree:90°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm



液壓鉸鏈系列

開啓角度:90度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):

CH-90-93F-T	Full Overlay 2 holes 直臂兩孔	
CH-90-93H-T	Half Overlay 2 holes 中曲兩孔	
CH-90-93I-T	Inset 2 holes 大曲兩孔	
CH-90-93F-E	Full Overlay 4 holes 直臂四孔	
CH-90-93H-E	Half Overlay 4 holes 中曲四孔	
CH-90-93I-E	Inset 4 holes 大曲四孔	

可選鉸杯 (Optional hinge cups)



D:蓋位計算值表 Overlay calculation

D	H	4	5
0		20/4.8	19/4.8
2		20/2.8	19/2.8
X			D

可選配件 (Optional fitting)



Soft-closing hinge series


Open degree:165°
Height of hinge cup:11.5mm
Diameter of hinge cup:35mm
Recommended door thickness:14-21mm

液壓鉸鏈系列

開啓角度:165度
鉸杯高度:11.5毫米
鉸杯直徑:35毫米
門可選用板厚度:14-21毫米

訂貨編號 (ITEM NO.):


CH-165-93F-T	Full Overlay 2 holes 直臂兩孔	
CH-165-93H-T	Half Overlay 2 holes 中曲兩孔	
CH-165-93I-T	Inset 2 holes 大曲兩孔	



D:蓋位計算值表 Overlay calculation

D	H	3	4	5	6	7
0		16	17	18	19	20


Full Overlay 直臂



D:蓋位計算值表 Overlay calculation

D	H	3	4	5	6	7
0		7	8	9	10	11

Half Overlay 中曲




A:蓋位計算值表 Overlay calculation

A	H	3	4	5	6	7
2		-2.5	-1.5	-0.5	0.5	1.5

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)





Soft-closing hinge series

Open degree:95°
Height of hinge cup:11.5mm
Diameter of hinge cup:40mm
Distance from door edge to the cup (K):3-12mm
Recommended door thickness:16-40mm

液壓鉸鏈系列

開啓角度:95度
鉸杯高度:11.5毫米
鉸杯直徑:40毫米
面板尺寸(K):3-12毫米
門可選用板厚度:16-40毫米

訂貨編號(ITEM NO.):

CH-391F-T	Full Overlay 2 holes 直臂兩孔	
CH-391H-T	Half Overlay 2 holes 中曲兩孔	
CH-391I-T	Inset 2 holes 大曲兩孔	
CH-391F-E	Full Overlay 4 holes 直臂四孔	
CH-391H-E	Half Overlay 4 holes 中曲四孔	
CH-391I-E	Inset 4 holes 大曲四孔	



Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



Soft-closing hinge series

Open degree:95°
Height of hinge cup:11.5mm
Diameter of hinge cup:40mm
Distance from door edge to the cup (K):3-12mm
Recommended door thickness:16-40mm

液壓鉸鏈系列

開啓角度:95度
鉸杯高度:11.5毫米
鉸杯直徑:40毫米
面板尺寸(K):3-12毫米
門可選用板厚度:16-40毫米

訂貨編號(ITEM NO.):

CH-393F-T	Full Overlay 2 holes 直臂兩孔	
CH-393H-T	Half Overlay 2 holes 中曲兩孔	
CH-393I-T	Inset 2 holes 大曲兩孔	
CH-393F-E	Full Overlay 4 holes 直臂四孔	
CH-393H-E	Half Overlay 4 holes 中曲四孔	
CH-393I-E	Inset 4 holes 大曲四孔	



Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)





Soft-closing hinge series


Open degree:105°
Diameter of hinge cup:35mm
Distance from door edge to the cup (K): 3-7mm
Recommended door thickness: 4-7mm

液壓鉸鏈系列


開啓角度:105度
鉸杯直徑:35毫米
玻璃板(K)尺寸: 3-7毫米
玻璃門可選用板厚: 4-7毫米

訂貨編號(ITEM NO.):

CH-591F-T	Full Overlay 2 holes 直臂兩孔	
CH-591H-T	Half Overlay 2 holes 中曲兩孔	
CH-591I-T	Inset 2 holes 大曲兩孔	
CH-591F-E	Full Overlay 4 holes 直臂四孔	
CH-591H-E	Half Overlay 4 holes 中曲四孔	
CH-591I-E	Inset 4 holes 大曲四孔	

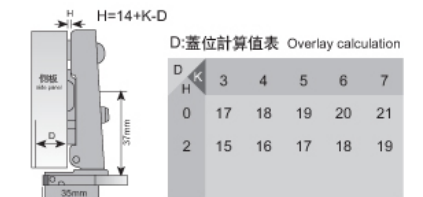

Full Overlay 直臂

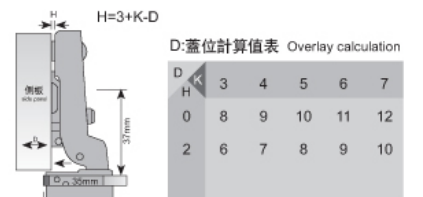

Half Overlay 中曲



Inset 大曲



可選裝飾蓋 Optional decoration cover



可選配件 (Optional fitting)



Soft-closing hinge series


Open degree:105°
Diameter of hinge cup:35mm
Distance from door edge to the cup (K): 3-7mm
Recommended door thickness: 4-7mm

液壓鉸鏈系列


開啓角度:105度
鉸杯直徑:35毫米
玻璃板(K)尺寸: 3-7毫米
玻璃門可選用板厚: 4-7毫米

訂貨編號(ITEM NO.):

CH-593F-T	Full Overlay 2 holes 直臂兩孔	
CH-593H-T	Half Overlay 2 holes 中曲兩孔	
CH-593I-T	Inset 2 holes 大曲兩孔	
CH-593F-E	Full Overlay 4 holes 直臂四孔	
CH-593H-E	Half Overlay 4 holes 中曲四孔	
CH-593I-E	Inset 4 holes 大曲四孔	

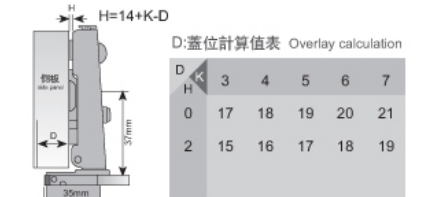

Full Overlay 直臂

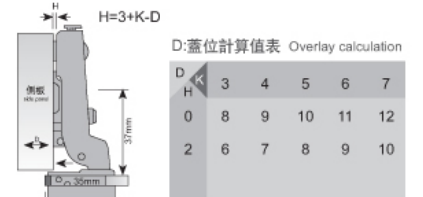

Half Overlay 中曲



Inset 大曲



可選裝飾蓋 Optional decoration cover



可選配件 (Optional fitting)





Soft-closing hinge series


Open degree:105°
Drilling size on aluminum fram hinge cup 28mm
Width of aluminum profile:19-24mm

液壓鉸鏈系列


開啓角度:105度
鋁框鉸杯鑽孔尺寸: 28毫米
鋁型材可選用寬度: 19-24毫米

訂貨編號 (ITEM NO.):


CH-691F-T	Full Overlay 2 holes 直臂兩孔	
CH-691H-T	Half Overlay 2 holes 中曲兩孔	
CH-691I-T	Inset 2 holes 大曲兩孔	
CH-691F-E	Full Overlay 4 holes 直臂四孔	
CH-691H-E	Half Overlay 4 holes 中曲四孔	
CH-691I-E	Inset 4 holes 大曲四孔	

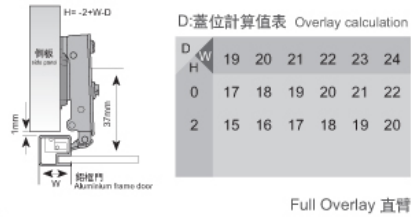

Full Overlay 直臂

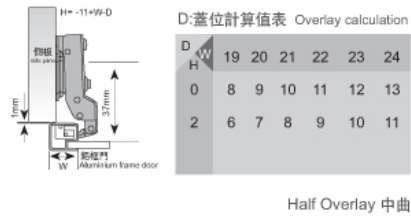


Half Overlay 中曲

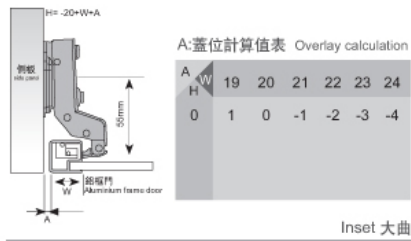

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



Soft-closing hinge series


Open degree:105°
Drilling size on aluminum fram hinge cup 28mm
Width of aluminum profile:19-24mm

液壓鉸鏈系列


開啓角度:105度
鋁框鉸杯鑽孔尺寸: 28毫米
鋁型材可選用寬度: 19-24毫米

訂貨編號 (ITEM NO.):


CH-693F-T	Full Overlay 2 holes 直臂兩孔	
CH-693H-T	Half Overlay 2 holes 中曲兩孔	
CH-693I-T	Inset 2 holes 大曲兩孔	
CH-693F-E	Full Overlay 4 holes 直臂四孔	
CH-693H-E	Half Overlay 4 holes 中曲四孔	
CH-693I-E	Inset 4 holes 大曲四孔	

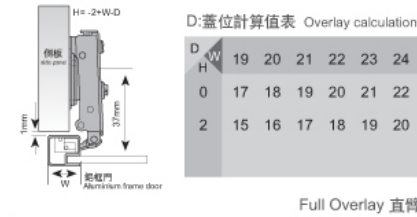

Full Overlay 直臂

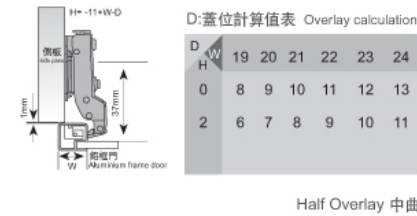


Half Overlay 中曲

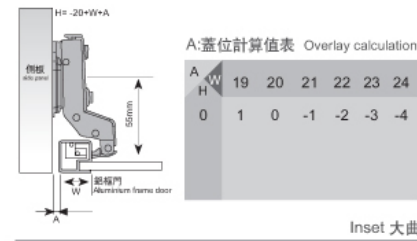

Inset 大曲

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)





Soft-closing hinge series




Open degree:105°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:105度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):


CH-281F-T	Full Overlay 2 holes 直臂兩孔	
CH-281H-T	Half Overlay 2 holes 中曲兩孔	
CH-281I-T	Inset 2 holes 大曲兩孔	
CH-281F-E	Full Overlay 4 holes 直臂四孔	
CH-281H-E	Half Overlay 4 holes 中曲四孔	
CH-281I-E	Inset 4 holes 大曲四孔	

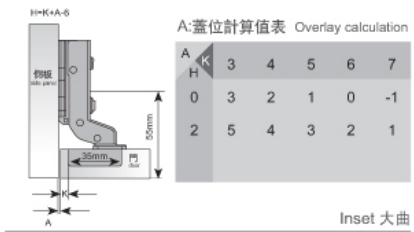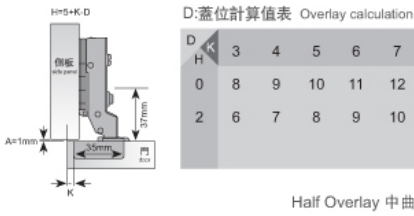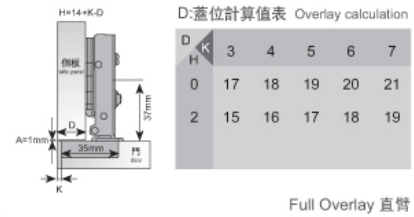

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)

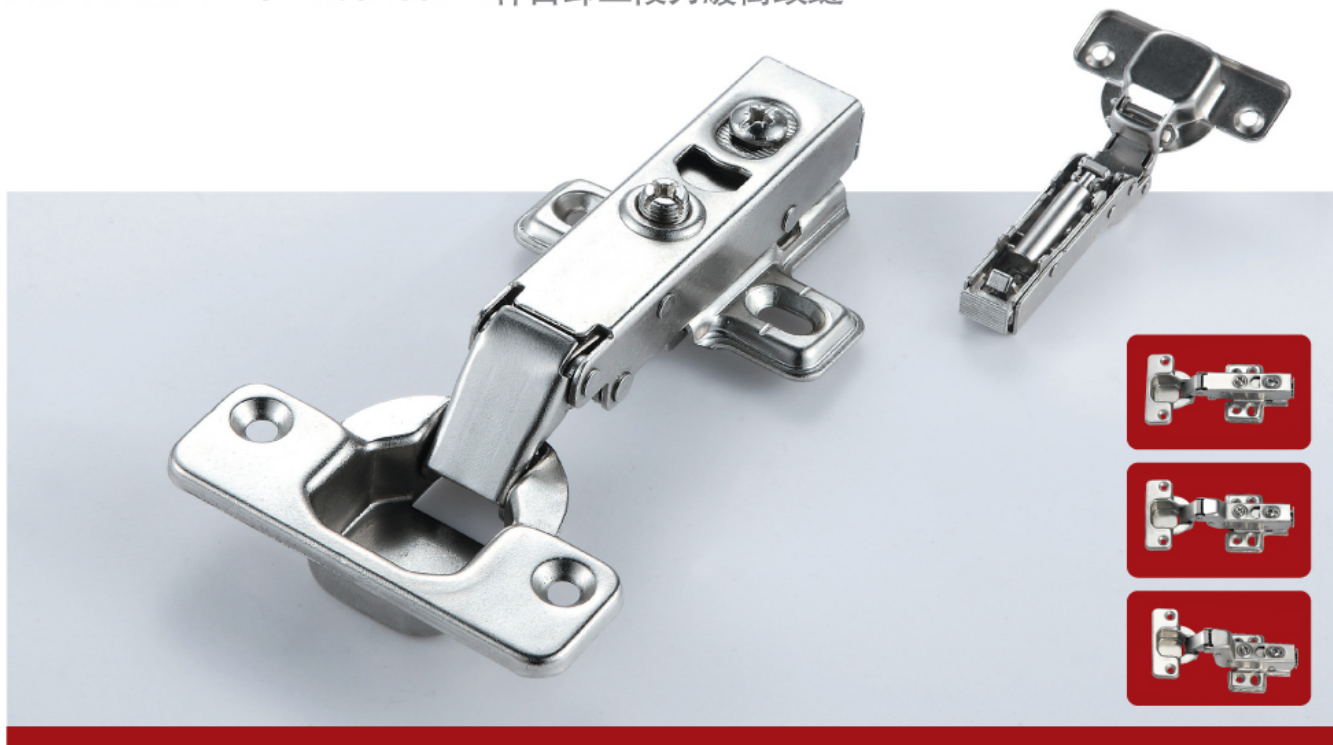

Soft-closing hinge series




Open degree:105°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

液壓鉸鏈系列


開啓角度:105度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-283F-T	Full Overlay 2 holes 直臂兩孔	
CH-283H-T	Half Overlay 2 holes 中曲兩孔	
CH-283I-T	Inset 2 holes 大曲兩孔	
CH-283F-E	Full Overlay 4 holes 直臂四孔	
CH-283H-E	Half Overlay 4 holes 中曲四孔	
CH-283I-E	Inset 4 holes 大曲四孔	

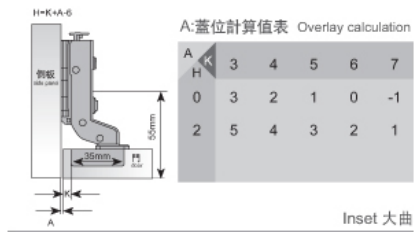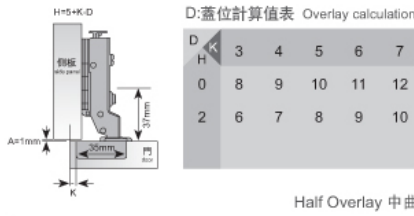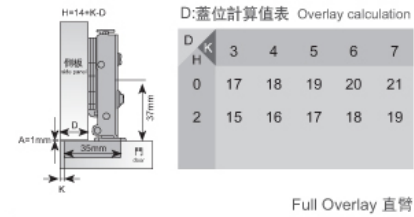

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



榮易
ROE'ASY

35mm cup clip-on two-way soft-closing hinge with 3D adjustment base
CH-283 3D
35mm杯自卸二段力緩衝鉸鏈 (3D調節底座)






Soft-closing hinge series

Open degree:105°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm


液壓鉸鏈系列
開啓角度:105度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):

CH-283F-3D	Full Overlay 2 holes 直臂兩孔	
CH-283H-3D	Half Overlay 2 holes 中曲兩孔	
CH-283I-3D	Inset 2 holes 大曲兩孔	

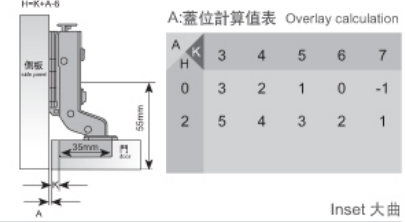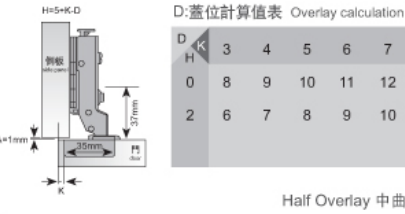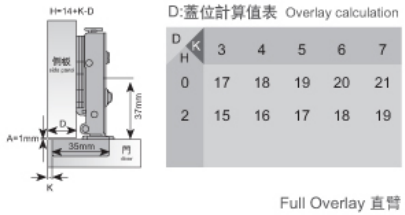

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



榮易
ROE'ASY

荣易
ROE'ASY

26mm cup slide-on one-way hinge with short arm
CH-155F 26mm杯滑入式一段力短臂铰链



One-way hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-23mm

一段力铰链系列

开启角度:95度
铰杯高度:11.3毫米
铰杯直径:26毫米
面板尺寸(K):3-5毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-155F	Full Overlay 直臂	
---------	-----------------	--

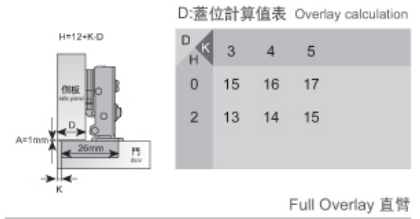

可选配件 (Optional fitting)



荣易
ROE'ASY

26mm cup slide-on one-way hinge
CH-151 26mm杯滑入式一段力铰链



One-way hinge series




Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-23mm

一段力铰链系列

开启角度:95度
铰杯高度:11.3毫米
铰杯直径:26毫米
面板尺寸(K):3-5毫米
门可选用板厚度:14-23毫米


订货编号(ITEM NO.):

CH-151F-T	Full Overlay 2 holes 直臂两孔	
CH-151H-T	Half Overlay 2 holes 中曲两孔	
CH-151I-T	Inset 2 holes 大曲两孔	

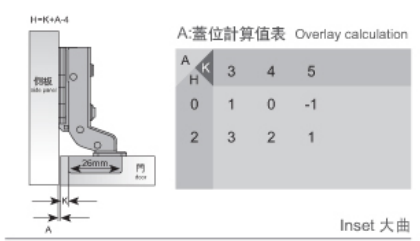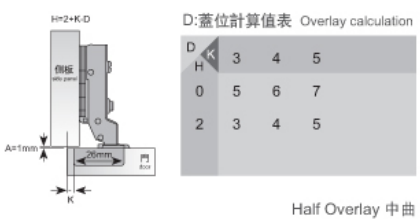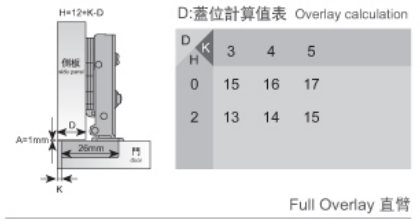

可选配件 (Optional fitting)



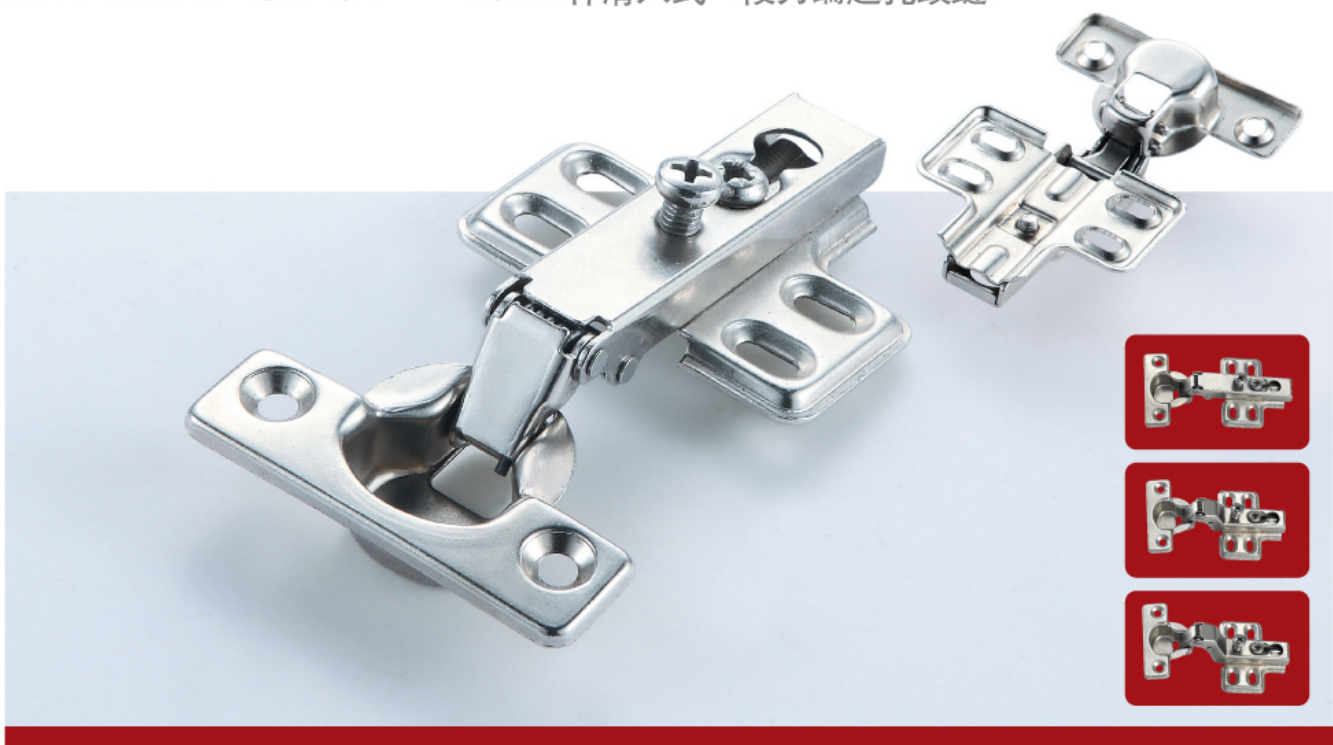

One-way hinge series

Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-23mm

一段力鉸鏈系列

開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:26毫米
面板尺寸(K):3-5毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-152F-T	Full Overlay 2 holes 直臂兩孔	
CH-152H-T	Half Overlay 2 holes 中曲兩孔	
CH-152I-T	Inset 2 holes 大曲兩孔	



Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



38mm孔距

可選配件 (Optional fitting)



One-way hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-23mm

一段力鉸鏈系列

開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:26毫米
面板尺寸(K):3-5毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-152BF-T	Full Overlay 2 holes 直臂兩孔	
CH-152BH-T	Half Overlay 2 holes 中曲兩孔	
CH-152BI-T	Inset 2 holes 大曲兩孔	

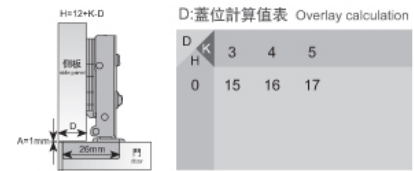

Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



38mm孔距

可選配件 (Optional fitting)





One-way hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-20mm



一段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-20毫米


訂貨編號(ITEM NO.):

CH-251F-T	Full Overlay 2 holes 直臂兩孔	
CH-251H-T	Half Overlay 2 holes 中曲兩孔	
CH-251I-T	Inset 2 holes 大曲兩孔	
CH-251F-E	Full Overlay 4 holes 直臂四孔	
CH-251H-E	Half Overlay 4 holes 中曲四孔	
CH-251I-E	Inset 4 holes 大曲四孔	


可選鉸杯 (Optional hinge cups)

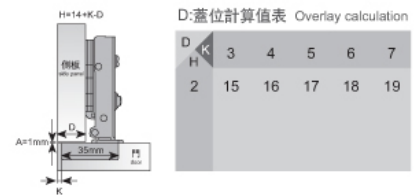

Full Overlay 直臂

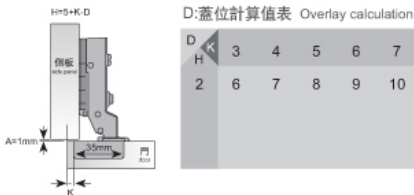

Half Overlay 中曲

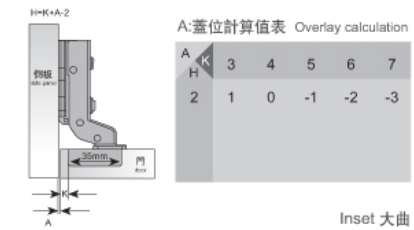

Inset 大曲

可選配件 (Optional fitting)



One-way hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-20mm



一段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-20毫米


訂貨編號(ITEM NO.):

CH-252F-T	Full Overlay 2 holes 直臂兩孔	
CH-252H-T	Half Overlay 2 holes 中曲兩孔	
CH-252I-T	Inset 2 holes 大曲兩孔	
CH-252F-E	Full Overlay 4 holes 直臂四孔	
CH-252H-E	Half Overlay 4 holes 中曲四孔	
CH-252I-E	Inset 4 holes 大曲四孔	


可選鉸杯 (Optional hinge cups)

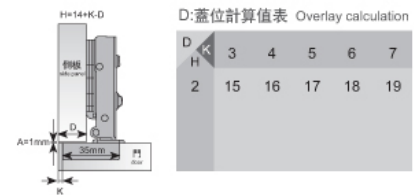

Full Overlay 直臂

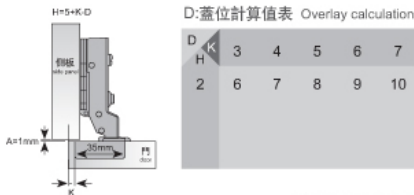

Half Overlay 中曲

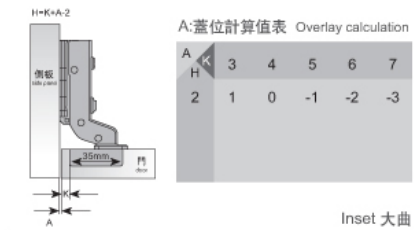

Inset 大曲

可選配件 (Optional fitting)





Two-way hinge series

Open degree:110°
Height of hinge cup:11.3-9mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm





二段力铰链系列

开启角度:110度
铰杯高度:11.3-9毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可選用板厚度:14-23毫米


訂貨編號(ITEM NO.):

CH-261F-T	Full Overlay 2 holes 直臂兩孔	
CH-261H-T	Half Overlay 2 holes 中曲兩孔	
CH-261I-T	Inset 2 holes 大曲兩孔	
CH-261F-E	Full Overlay 4 holes 直臂四孔	
CH-261H-E	Half Overlay 4 holes 中曲四孔	
CH-261I-E	Inset 4 holes 大曲四孔	

可選铰杯 (Optional hinge cups)

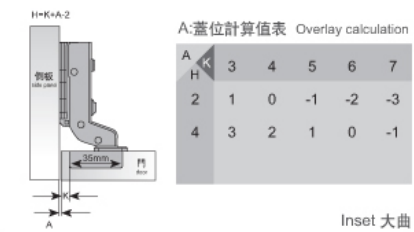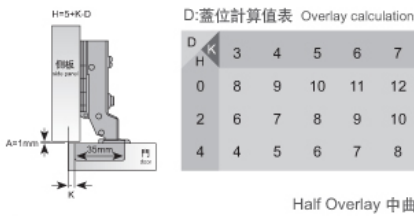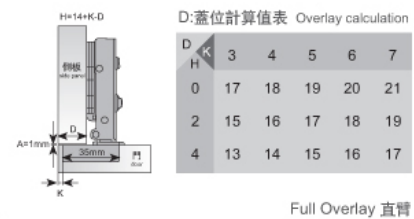

可選配件 (Optional fitting)

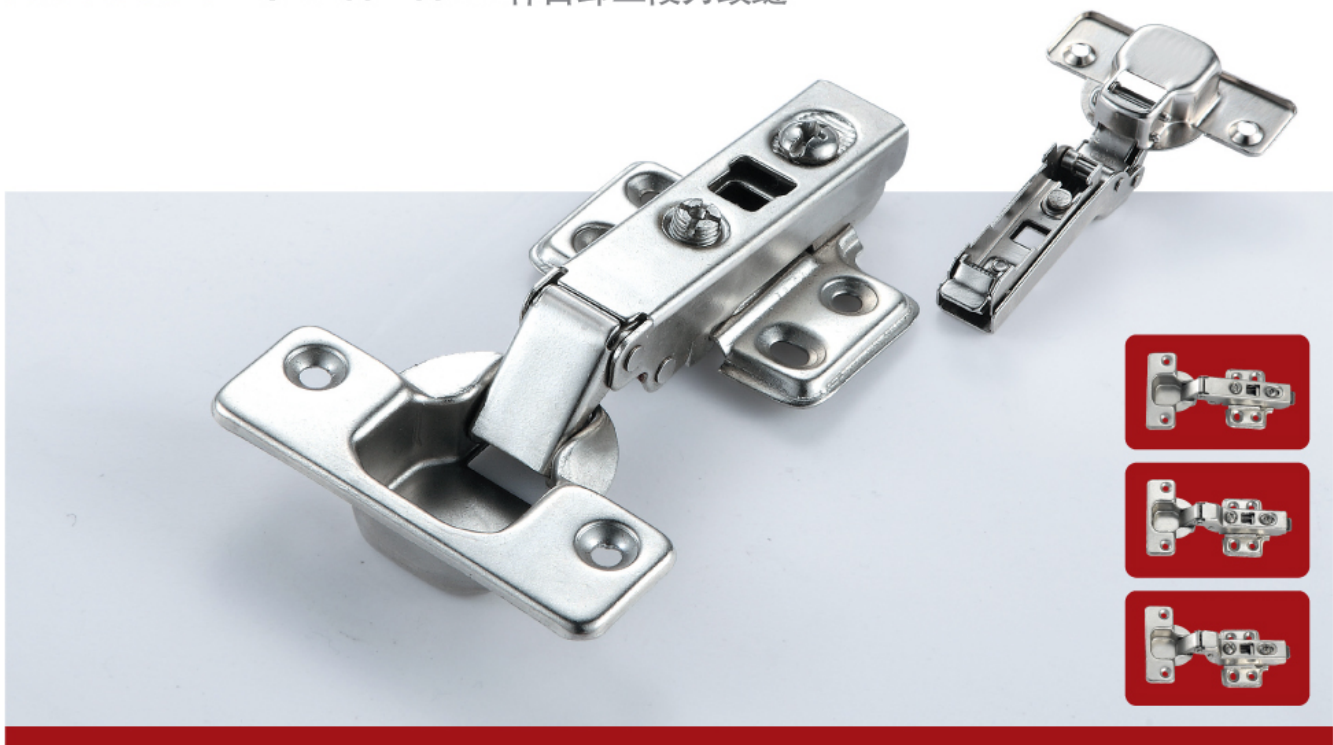

Two-way hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm





二段力铰链系列

开启角度:110度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-263F-E	Full Overlay 4 holes 直臂四孔	
CH-263H-E	Half Overlay 4 holes 中曲四孔	
CH-263I-E	Inset 4 holes 大曲四孔	

可選铰杯 (Optional hinge cups)

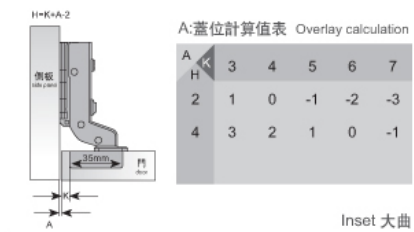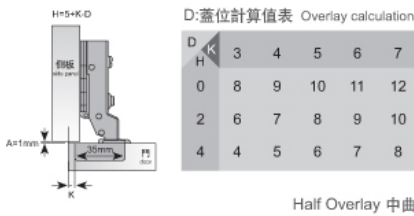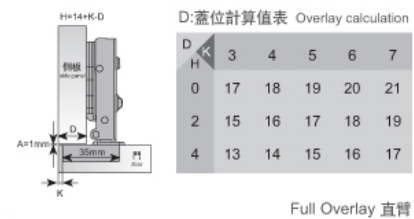

可選配件 (Optional fitting)





Two-way hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm





二段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-261SSF-T	Full Overlay 2 holes 直臂兩孔	
CH-261SSH-T	Half Overlay 2 holes 中曲兩孔	
CH-261SSI-T	Inset 2 holes 大曲兩孔	
CH-261SSF-E	Full Overlay 4 holes 直臂四孔	
CH-261SSH-E	Half Overlay 4 holes 中曲四孔	
CH-261SSI-E	Inset 4 holes 大曲四孔	

可選鉸杯 (Optional hinge cups)

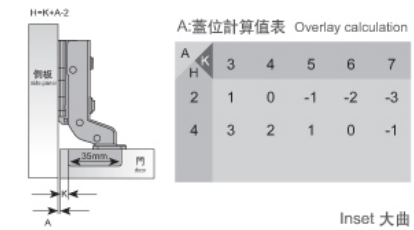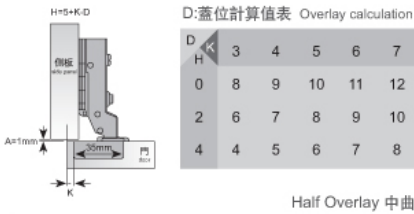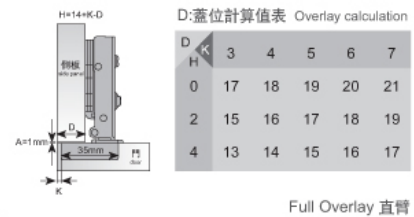

可選配件 (Optional fitting)



Two-way hinge series




Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

二段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-263SSF-E	Full Overlay 4 holes 直臂四孔	
CH-263SSH-E	Half Overlay 4 holes 中曲四孔	
CH-263SSI-E	Inset 4 holes 大曲四孔	

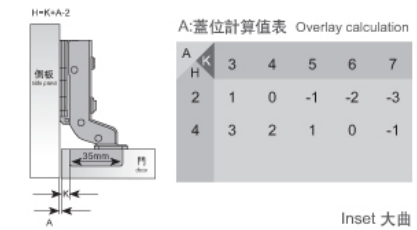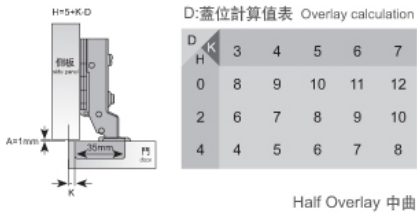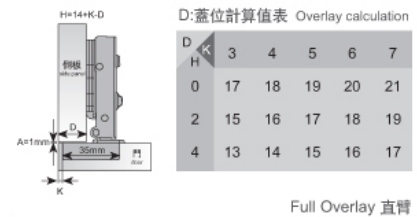

可選配件 (Optional fitting)





Two-way hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

二段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-261F-P1	Full Overlay 4 holes 直臂四孔	
CH-261H-P1	Half Overlay 4 holes 中曲四孔	
CH-261I-P1	Inset 4 holes 大曲四孔	



Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



48mm孔距

52mm孔距

可選配件 (Optional fitting)



Two-way hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

二段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-23毫米

訂貨編號(ITEM NO.):

CH-261F-P2	Full Overlay 4 holes 直臂四孔	
CH-261H-P2	Half Overlay 4 holes 中曲四孔	
CH-261I-P2	Inset 4 holes 大曲四孔	



Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



48mm孔距

52mm孔距

可選配件 (Optional fitting)





Two-way hinge series


Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

二段力鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸 (K) :3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):

CH-262F-P	Full Overlay 4 holes 直臂四孔	
CH-262H-P	Half Overlay 4 holes 中曲四孔	
CH-262I-P	Inset 4 holes 大曲四孔	

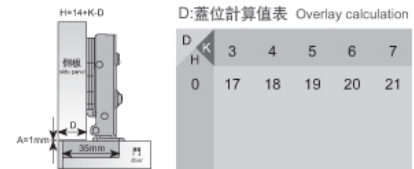

Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)



48mm孔距

52mm孔距

可選配件 (Optional fitting)



Push-open hinge series

Open degree:110°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

反彈鉸鏈系列

開啓角度:110度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸 (K) :3-7毫米
門可選用板厚度:14-23毫米

訂貨編號 (ITEM NO.):

CH-231F-T	Full Overlay 2 holes 直臂兩孔	
CH-231H-T	Half Overlay 2 holes 中曲兩孔	
CH-231I-T	Inset 2 holes 大曲兩孔	
CH-231F-E	Full Overlay 4 holes 直臂四孔	
CH-231H-E	Half Overlay 4 holes 中曲四孔	
CH-231I-E	Inset 4 holes 大曲四孔	



Full Overlay 直臂




Half Overlay 中曲



Inset 大曲

可選鉸杯 (Optional hinge cups)




48mm孔距

52mm孔距

可選配件 (Optional fitting)



35mm cup slide-on two-way hinge with short arm
CH-265A 35mm杯滑入式二段力美式短臂铰链

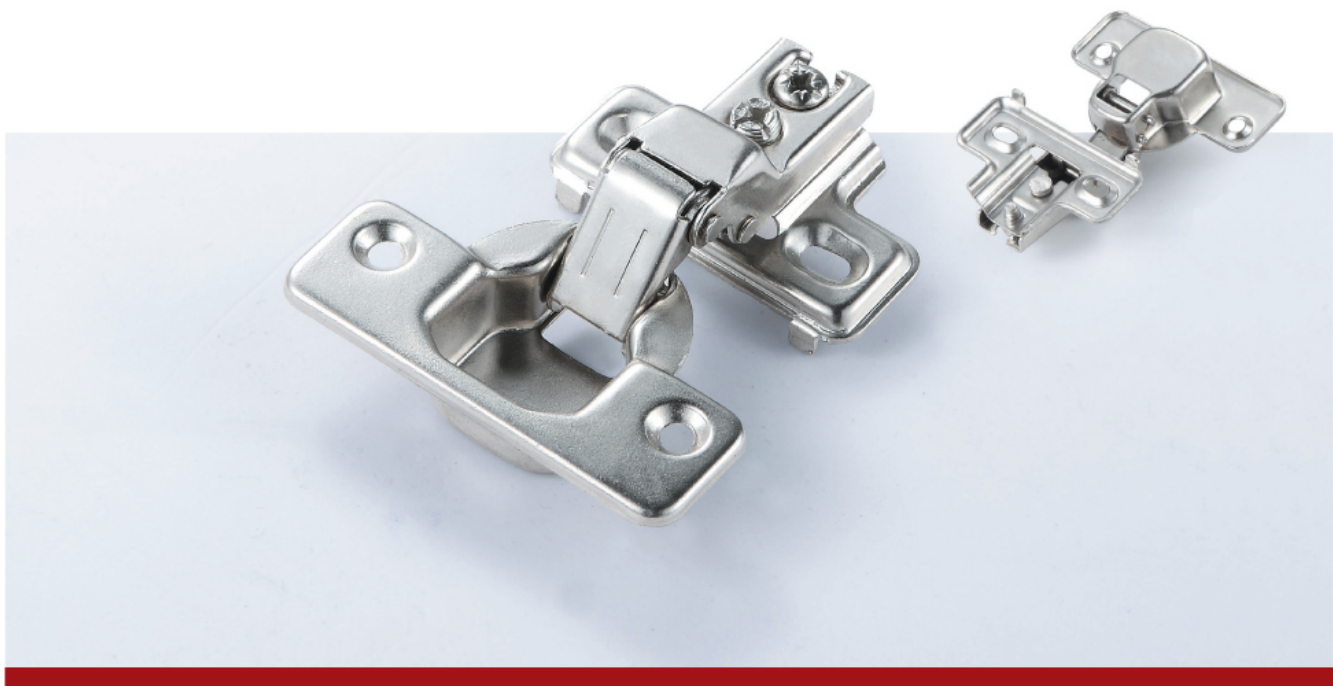

Short arm hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

短臂铰链系列


开启角度:95度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-265AH-T Half Overlay 2 holes 中曲两孔



可选铰杯 (Optional hinge cups)



D: 盖位计算值表 Overlay calculation

D	H	3	4	5
0		13	14	15

可选配件 (Optional fitting)



35mm cup slide-on two-way hinge with short arm
CH-265B 35mm杯滑入式二段力美式短臂铰链



Short arm hinge series


Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

短臂铰链系列


开启角度:95度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-265BH-T Half Overlay 2 holes 中曲两孔



可选铰杯 (Optional hinge cups)



D: 盖位计算值表 Overlay calculation

D	H	3	4	5
0		13	14	15

可选配件 (Optional fitting)



荣易 ROE'ASY -45 degree slide-on hinge CH-45-61 -45度滑入式铰链



Special angle hinge series


Open degree:-45°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列

开启角度:-45度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-20毫米

订货编号(ITEM NO.):


CH-45-61-T



D: 盖位计算值表 Overlay calculation

D	H	K	3	4	5	6	7
2.5	42.8	8.3	42.8	8.98	9.65	10	10.99
4.5	45	6.3	45	6.98	7.65	8.32	8.99
6.5	47.2	4.3	47.2	4.98	5.65	6.32	6.99
		X					
			D				

可选铰杯 (Optional hinge cups)



可选配件 (Optional fitting)



荣易 ROE'ASY -30 degree slide-on hinge CH-30-61 -30度滑入式铰链



Special angle hinge series


Open degree:-30°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列

开启角度:-30度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):


CH-30-61-T



D: 盖位计算值表 Overlay calculation

D	H	K	3	4	5	6	7
2.5	42.8	8.3	42.8	8.98	9.65	10.32	10.99
4.5	45	6.3	45	6.98	7.65	8.32	8.99
6.5	47.2	4.3	47.2	4.98	5.65	6.32	6.99
		X					
			D				

可选铰杯 (Optional hinge cups)



可选配件 (Optional fitting)





Special angle hinge series


Open degree:30°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列


开启角度:30度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-30-61-T



可选铰杯 (Optional hinge cups)



D: 盖位计算值表 Overlay calculation

D	K							
		4	5	6	7			
0	37	1.5	36	2.5	35	3.3	34	4.2
		-0.5	36	0.4	35	1.3	34	2.2
		-2.5	36	-1.6	35	-0.7	34	0.2
2	37	-0.5	36	0.4	35	1.3	34	2.2
		-2.5	36	-1.6	35	-0.7	34	0.2
		-2.5	36	-1.6	35	-0.7	34	0.2
4	37	-2.5	36	-1.6	35	-0.7	34	0.2
		-2.5	36	-1.6	35	-0.7	34	0.2
		-2.5	36	-1.6	35	-0.7	34	0.2
X		D						

可选配件 (Optional fitting)



Special angle hinge series


Open degree:45°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列


开启角度:45度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-45-61-T



可选铰杯 (Optional hinge cups)



D: 盖位计算值表 Overlay calculation

D	K							
		4	5	6	7			
0	37	6.5	36	7.2	35	7.9	34	8.6
		4.5	36	5.2	35	5.9	34	6.6
		3.5	36	3.2	35	3.9	34	4.6
X		D						

可选配件 (Optional fitting)





Special angle hinge series


Open degree:90°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列


开启角度: 90度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-90-61-T



可选铰杯 (Optional hinge cups)



D: 盖位计算值表 Overlay calculation

D	H	K	4		5	
			20	19	20	19
0			4.8	4.8	4.8	4.8
2			2.8	2.8	2.8	2.8
4			0.8	0.8	0.8	0.8
		X	D			

可选配件 (Optional fitting)



Special angle hinge series


Open degree:115°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列


开启角度:115度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号(ITEM NO.):

CH-115-61-T



可选铰杯 (Optional hinge cups)



D: 盖位计算值表 Overlay calculation

D	H	K	门板厚度 Door thickness<18mm	门板厚度 22mm> door thickness
			2mm	0mm
X			37mm	37mm

可选配件 (Optional fitting)



荣易
ROE'ASY

135 degree slide-on hinge
CH-135-61 135度滑入式铰链



Special angle hinge series


Open degree:135°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列

开启角度:135度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号 (ITEM NO.):


CH-135-61-T



D: 盖位计算值表 Overlay calculation

D	K	门板厚度	门板厚度
		Door thickness<18mm	22mm> >18mm door thickness
H			
X		2mm	0mm
		37mm	37mm

可选铰杯 (Optional hinge cups)



可选配件 (Optional fitting)



荣易
ROE'ASY

180 degree slide-on hinge
CH-180-61 180度滑入式铰链



Special angle hinge series


Open degree:180°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-23mm

特殊角度铰链系列

开启角度:180度
铰杯高度:11.3毫米
铰杯直径:35毫米
面板尺寸(K):3-7毫米
门可选用板厚度:14-23毫米

订货编号 (ITEM NO.):


CH-180-61-T



D: 盖位计算值表 Overlay calculation

D	K	4	5
H			
2.5		20 4.8 19 4.8	
4.5		20 2.8 19 2.8	
6.5		20 0.8 19 0.8	
	X		D

可选铰杯 (Optional hinge cups)



可选配件 (Optional fitting)



荣易 ROE'ASY 165 degree slide-on hinge CH-165-61 165度滑入式鉸鏈



Special angle hinge series



Open degree:165°
Height of hinge cup:11.3mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-25mm

特殊角度鉸鏈系列


開啓角度:165度
鉸杯高度:11.3毫米
鉸杯直徑:35毫米
面板尺寸 (K) :3-7毫米
門可選用板厚度:14-25毫米

訂貨編號 (ITEM NO.):

CH-165-61F-T	Full Overlay 2 holes 直臂兩孔	
CH-165-61H-T	Half Overlay 2 holes 中曲兩孔	
CH-165-61I-T	Inset 2 holes 大曲兩孔	
CH-165-61F-E	Full Overlay 2 holes 直臂兩孔	
CH-165-61H-E	Half Overlay 2 holes 中曲兩孔	
CH-165-61I-E	Inset 2 holes 大曲兩孔	
CH-165-61F-P	Full Overlay 2 holes 直臂兩孔	
CH-165-61H-P	Half Overlay 2 holes 中曲兩孔	
CH-165-61I-P	Inset 2 holes 大曲兩孔	

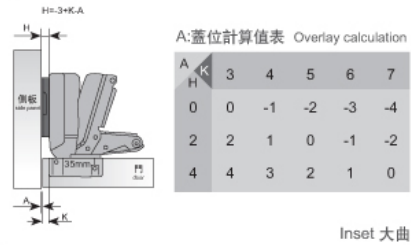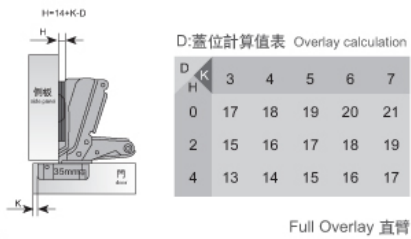

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易 ROE'ASY 40mm cup slide-on two-way hinge CH-361 40mm杯滑入式二段力鉸鏈



Two-way hinge series


Open degree:95°
Height of hinge cup:11.5mm
Diameter of hinge cup:40mm
Distance from door edge to the cup (K):3-15mm
Recommended door thickness:16-40mm

二段力鉸鏈系列


開啓角度:95度
鉸杯高度:11.5毫米
鉸杯直徑:40毫米
面板尺寸 (K) :3-15毫米
門可選用板厚度:16-40毫米

訂貨編號 (ITEM NO.):

CH-361F-T	Full Overlay 2 holes 直臂兩孔	
CH-361H-T	Half Overlay 2 holes 中曲兩孔	
CH-361I-T	Inset 2 holes 大曲兩孔	
CH-361F-E	Full Overlay 4 holes 直臂四孔	
CH-361H-E	Half Overlay 4 holes 中曲四孔	
CH-361I-E	Inset 4 holes 大曲四孔	

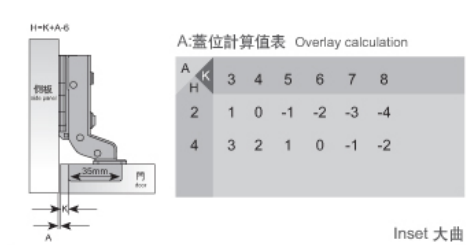

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



26mm cup slide-on one-way glass hinge with key-hole
CH-551 26mm杯滑入式一段力鑰匙孔玻璃鉸鏈



One-way hinge series



Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:4-6mm

一段力鉸鏈系列

開啓角度:95度
鉸杯厚度: 11.3毫米
鉸杯直徑: 26毫米
玻璃板 (K) 尺寸: 3-5毫米
玻璃門可選用板厚: 4-6毫米

訂貨編號 (ITEM NO.):

CH-551F-T	Full Overlay 2 holes 直臂兩孔	
CH-551H-T	Half Overlay 2 holes 中曲兩孔	
CH-551I-T	Inset 2 holes 大曲兩孔	

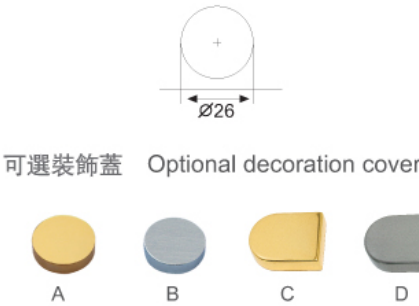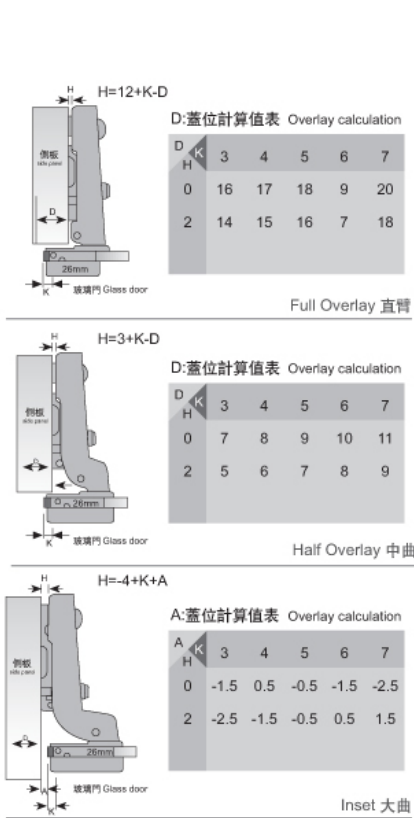

可選配件 (Optional fitting)



26mm cup slide-on two-way glass hinge
CH-561 26mm杯滑入式二段力玻璃鉸鏈



Two-way hinge series



Open degree:95°
Height of hinge cup:11.3mm
Diameter of hinge cup:26mm
Distance from door edge to the cup (K):3-5mm
Recommended door thickness:14-23mm

二段力鉸鏈系列

開啓角度:95度
鉸杯高度:11.3毫米
鉸杯直徑:26毫米
面板尺寸 (K): 3-5毫米
門可選用板厚度: 14-23毫米

訂貨編號 (ITEM NO.):

CH-561F-T	Full Overlay 2 holes 直臂兩孔	
CH-561H-T	Half Overlay 2 holes 中曲兩孔	
CH-561I-T	Inset 2 holes 大曲兩孔	
CH-561F-E	Full Overlay 4 holes 直臂四孔	
CH-561H-E	Half Overlay 4 holes 中曲四孔	
CH-561I-E	Inset 4 holes 大曲四孔	

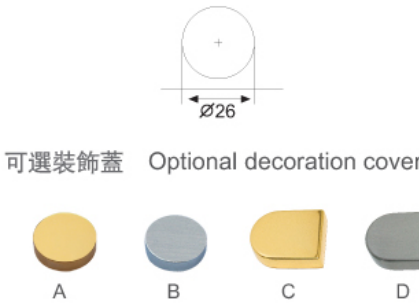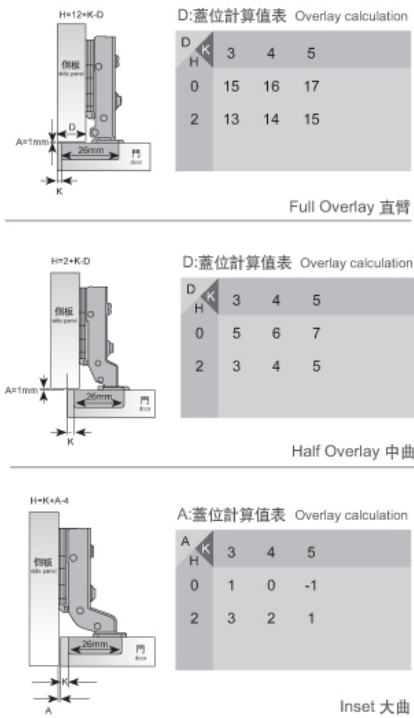

可選配件 (Optional fitting)





Two-way hinge series




Open degree:100°
Height of hinge cup:11.5mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-20mm

二段力鉸鏈系列


開啓角度:100度
鉸杯高度:11.5毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-20毫米

訂貨編號(ITEM NO.):

CH-661F-T	Full Overlay 2 holes 直臂兩孔	
CH-661H-T	Half Overlay 2 holes 中曲兩孔	
CH-661I-T	Inset 2 holes 大曲兩孔	
CH-661F-E	Full Overlay 4 holes 直臂四孔	
CH-661H-E	Half Overlay 4 holes 中曲四孔	
CH-661I-E	Inset 4 holes 大曲四孔	

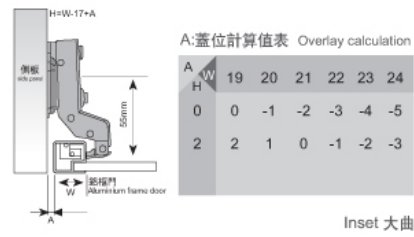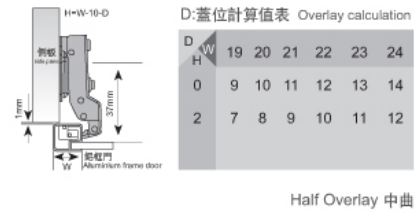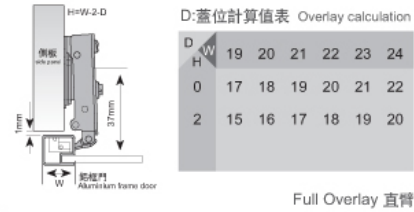

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



Two-way hinge series




Open degree:100°
Height of hinge cup:11.5mm
Diameter of hinge cup:35mm
Distance from door edge to the cup (K):3-7mm
Recommended door thickness:14-20mm

二段力鉸鏈系列


開啓角度:100度
鉸杯高度:11.5毫米
鉸杯直徑:35毫米
面板尺寸(K):3-7毫米
門可選用板厚度:14-20毫米

訂貨編號(ITEM NO.):

CH-663F-T	Full Overlay 2 holes 直臂兩孔	
CH-663H-T	Half Overlay 2 holes 中曲兩孔	
CH-663I-T	Inset 2 holes 大曲兩孔	
CH-663F-E	Full Overlay 4 holes 直臂四孔	
CH-663H-E	Half Overlay 4 holes 中曲四孔	
CH-663I-E	Inset 4 holes 大曲四孔	

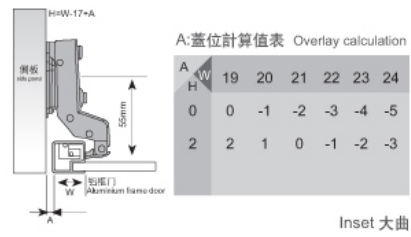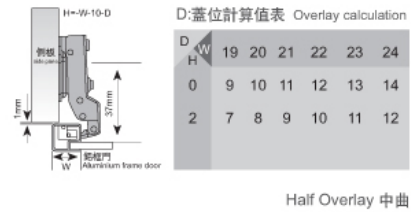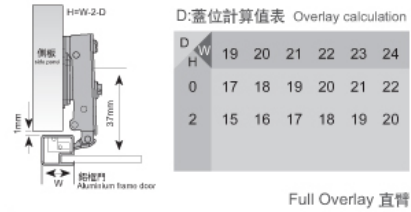

可選鉸杯 (Optional hinge cups)



可選配件 (Optional fitting)



荣易
ROE'ASY

Furniture concealed hinge
FH-001 櫃門鉸鏈




Furniture concealed hinge series 櫃門鉸鏈系列

Open degree:165° 開啓角度:165度

Recommended door thickness:16-40mm 門可選用板厚度:16-40毫米

訂貨編號 (ITEM NO.):	
FH-001	

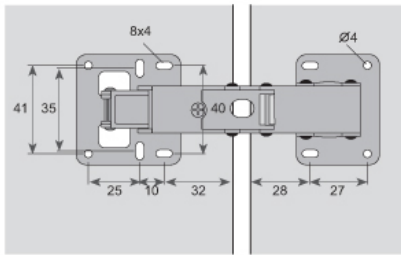

可選配件 (Optional fitting)



荣易
ROE'ASY

Furniture concealed hinge
FH-002 櫃門鉸鏈





Furniture concealed hinge series 櫃門鉸鏈系列

Open degree:90° 開啓角度:90度

Distance from door edge to the cup (K):5mm 面板尺寸 (K):5毫米

Recommended door thickness:14-20mm 門可選用板厚度:14-20毫米

訂貨編號 (ITEM NO.):	
FH-002S	Small 小的
FH-002L	Large 大的



可選配件 (Optional fitting)



荣易 ROE'ASY Invisible hinge FH-003 隱藏合頁




Invisible hinge series

Open degree:180°
Recommended door thickness:14-40mm

隱藏合頁系列


開啓角度:180度
門可選用板厚度:14-40毫米

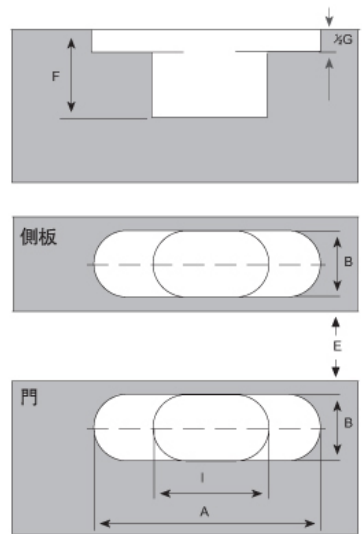

訂貨編號 (ITEM NO.):

FH-003-118	
FH-003-94	
FH-003-69	
FH-003-62	
FH-003-45	

Item NO	A	B	C	D	E	F	G	H	I
118	118	27	62	89	22	40	24	64	81
94	94	19.2	34	77	14	26.5	19	51.5	55
69	69	15.5	27	52	11	23	16	33	46
62	62	15.5	26	46	10.7	21	14.5	30	44
45	45	12	21	32	9.5	17.5	8.5	17.5	37.5

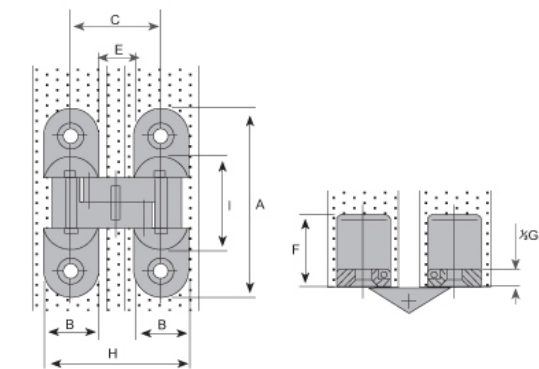


可選配件 (Optional fitting)



荣易 ROE'ASY Piano hinge PH 鋼琴鉸鏈



Item no.	T*W*L	DIA (MM)	Finish	DIS (MM)	Y (MM)	Packing	
PH-182505	0.5mm*25mm(1")*1.8m	3.7	CP/SS	50	12.5	5*20=100	
PH-183005	0.5mm*30mm(1.2")*1.8m	3.7	CP/SS	50	12.5	5*20=100	
PH-183805	0.5mm*38mm(1.5")*1.8m	3.7	CP/SS	50	12.5	5*20=100	
PH-182506	0.6mm*25mm(1")*1.8m	4.3	CP/SS	50	12.5	5*20=100	
PH-183006	0.6mm*30mm(1.2")*1.8m	3.8	CP/SS	50	12.5	5*20=100	
PH-183806	0.6mm*38mm(1.5")*1.8m	3.8	CP/SS	50	12.5	5*20=100	
PH-182508	0.8mm*25mm(1")*1.8m	4.3	CP/SS	50	12.5	3*20=60	
PH-183008	0.8mm*30mm(1.2")*1.8m	4.3	CP/SS	50	12.5	3*20=60	
PH-183808	0.8mm*38mm(1.5")*1.8m	4.3	CP/SS	50	12.5	3*20=60	
PH-182509	0.9m*25mm(1")*1.8m	4.3	CP/SS	50	12.5	3*20=60	
PH-183009	0.9m*30mm(1.2")*1.8m	4.3	CP/SS	50	12.5	3*20=60	
PH-183809	0.9m*38mm(1.5")*1.8m	4.3	CP/SS	50	12.5	3*20=60	
PH-185009	0.9m*50mm(2")*1.8m	4.3	CP/SS	60	12.5	4*10=40	
PH-183012	1.2m*30mm(1.2")*1.8m	5.8	CP/SS	60	20	2*10=20	
PH-183812	1.2m*38mm(1.5")*1.8m	5.8	CP/SS	60	20	2*10=20	
PH-185012	1.2m*50mm(2")*1.8m	5.8	CP/SS	60	20	2*10=20	
PH-187512	1.2m*75mm(3")*1.8m	7.5	CP/SS	60	20	4*5=20	
PH-183015	1.5mm*30mm(1.2")*1.8m	7.5	CP/SS	60	20	2*10=20	
PH-183815	1.5mm*38mm(1.5")*1.8m	7.5	CP/SS	60	20	2*10=20	
PH-185015	1.5mm*50mm(2")*1.8m	7.5	CP/SS	60	20	4*5=20	
PH-187515	1.5mm*75mm(3")*1.8m	7.5	CP/SS	60	20	4*5=20	



可選配件 (Optional fitting)



可按特殊規格定做
Available to customize the special specification

